

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number  
**WO 2004/023485 A1**

(51) International Patent Classification<sup>7</sup>: **G11B 20/12**

(21) International Application Number:  
PCT/KR2003/001800

(22) International Filing Date:  
3 September 2003 (03.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10-2002-0053608  
5 September 2002 (05.09.2002) KR  
10-2002-0056235  
16 September 2002 (16.09.2002) KR  
10-2002-0056923  
18 September 2002 (18.09.2002) KR

(71) Applicant: **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-010 (KR).

(72) Inventors: **KIM, Byung Jin**; 111-204, Hansol Chungu APT., 110, Jeongja-dong, Bundang-gu, Sungnam, Kyunggi-do 463-010 (KR). **PARK, Sung Wan**; 337-1403, Byuksan APT., Doogyun Maeul, Jungja-dong, Jang-gu, Suwon-si 440-300 (KR). **UM, Soung Hyun**;

18-701, Samho-Apt., Bisan-dong, Dongan-gu, Anyang, Kyunggi-do 431-050 (KR). **SEO, Kang Soo**; 606-503, Chowon Hanyang Apt., 897-5, Pyoungan-dong, Dongan-gu, Anyang, Kyunggi-do 431-075 (KR).

(74) Agent: **PARK, Lae Bong**; 1Fl., Dongun Bldg., 413-4 Dogok 2-dong, Kangnam-gu, Seoul 135-272 (KR).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING REPRODUCTION OF STILL IMAGES RECORDED THEREON AND RECORDING AND REPRODUCING METHODS AND APPARATUSES

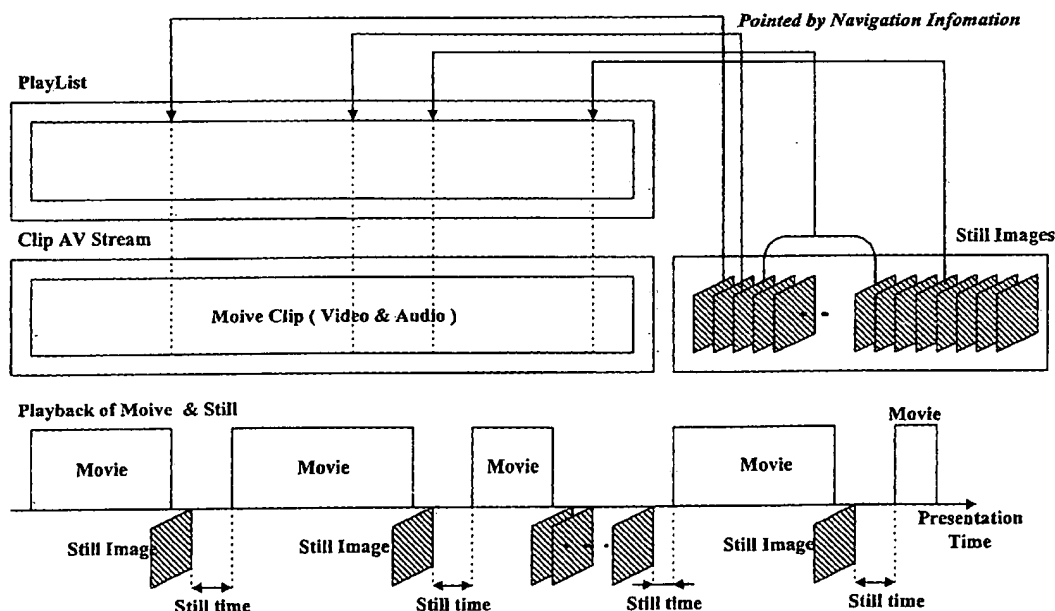

(57) Abstract: The recording medium includes a data area storing still images and audio data in separate files and a navigation area storing navigation information for reproducing the still images and the audio data together as a slideshow.

WO 2004/023485 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# DESCRIPTION

## RECORDING MEDIUM HAVING DATA STRUCTURE FOR MANAGING REPRODUCTION OF STILL IMAGES RECORDED THEREON AND RECORDING AND REPRODUCING METHODS AND APPARATUSES

5

### 1. TECHNICAL FIELD

The present invention relates to a recording medium having a data structure for managing reproduction of at least still images recorded thereon as well as methods and apparatuses for reproduction and recording.

10

### 2. BACKGROUND ART

The standardization of new high-density read only and rewritable optical disks capable of recording large amounts of high-quality video and audio data has been progressing rapidly and new optical disk related products are expected to be commercially available on the market in the near future. The Blu-ray Disc Rewritable (BD-RE) and Blu-ray Disk ROM (BD-ROM) are examples of these new optical disks.

15

The standardization for high-density read-only optical disks such as the Blu-ray ROM (BD-ROM) is still under way. An effective data structure for managing reproduction of still images recorded on the high-density read-only optical disk such as a BD-ROM is not yet available.

20

### 3. DISCLOSURE OF INVENTION

The recording medium according to the present invention includes a data structure for managing reproduction of at least still images recorded on the recording medium.

25

In one exemplary embodiment, a data area of the recording

medium stores at least one still image in a first file and audio data in a second file. A playlist area of the recording medium stores at least one playlist, and the playlist links the first and second files. For example, the playlist includes navigation  
5 information providing presentation information regarding the first and second files.

In one exemplary embodiment, the playlist includes one of a playitem field and a sub-playitem field providing the navigation information for the still image file. According to a further  
10 exemplary embodiment, another one of a playitem field and a sub-playitem field provides navigation information for the audio data. In another exemplary embodiment, the playlist includes includes mark information, and the mark information includes a mark associated with a point in the audio data and which points to the  
15 still picture.

The present invention further provides apparatuses and methods for recording and reproducing the data structure according to the present invention, and recording and reproducing slideshows according to the present invention.

#### 20 4. BRIEF DESCRIPTION OF DRAWINGS

The above features and other advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

25 Fig. 1 illustrates an exemplary embodiment of a recording medium file or data structure according to the present invention;

Fig. 2 illustrates an example of a recording medium having the data structure of Fig. 1 stored thereon;

Fig. 3 illustrates a method of managing still images for a  
30 high-density optical disk in accordance with one embodiment of the invention;

Fig. 4 illustrates a method of managing still images for a

high-density optical disk in accordance with another exemplary embodiment of the invention;

Fig. 5A illustrates one exemplary method of managing still images in accordance with an exemplary embodiment of the  
5 invention;

Fig. 5B illustrates one exemplary method of managing still images and video presentation units (VPUs) in accordance with an exemplary embodiment of the invention;

Fig. 6 illustrates one exemplary embodiment of the  
10 navigation information for still images provided by associated playlist marks;

Figs. 7A-7C illustrate other exemplary embodiments of the navigation information for still images and/or VPUs provided by associated playlist marks;

15 Fig. 8A illustrates another exemplary embodiment of a method of managing still images according to the present invention;

Fig. 8B illustrates another exemplary embodiment of a method of managing still images and VPUs according to the present invention;

20 Fig. 9A illustrates an exemplary embodiment of the navigation information for still images provided by a still indicator information field;

Fig. 9B illustrates an exemplary embodiment of the navigation information for still images and VPUs provided by a  
25 slideshow indicator information field;

Fig. 10 illustrates another exemplary embodiment of a method for managing still images according to the present invention;

Figs. 11A and 11B each illustrate an exemplary embodiment of the playitem information field according to the present  
30 invention;

Fig. 12A illustrates another exemplary embodiment of a method for managing still images according to the present invention;

Fig. 12B illustrates another exemplary embodiment of a method for managing still images and VPU's according to the present invention;

Figs. 13A and 13B each illustrate an exemplary embodiment of the sub-playitem information field according to the present invention;

Fig. 14A illustrates a method of recording still information packets for identifying still display positions in accordance with an exemplary embodiment the invention;

10 Fig. 14B illustrates a method of recording slideshow information packets for identifying display positions in accordance with an exemplary embodiment the invention; and

Fig. 15 illustrates a method of recording still information packets for identifying still display positions in accordance 15 with another exemplary embodiment the invention;

Fig. 16 illustrates a schematic diagram of an embodiment of an optical disk recording and reproduction apparatus of the present invention;

Figs. 17-19 illustrate examples of synchronized or 20 time-based slideshows; and

Fig. 20 illustrates an example of a browsable slideshow.

## 5. MODES FOR CARRYING OUT THE INVENTION

In order that the invention may be fully understood, exemplary embodiments thereof will now be described with reference 25 to the accompanying drawings.

A high-density optical disk, for example, a Blu-Ray ROM (BD-ROM), BD-RE, etc. in accordance with the invention may have a file or data structure for managing reproduction of video and audio data as shown in Fig. 1. Some aspects of the data structure 30 according to the present invention shown in Fig. 1 are the same as the well-known BD-RE standard, as such these aspects will not be described in great detail.

As shown in Fig. 1, the root directory contains at least one BD directory. The BD directory includes general files (not shown), a PLAYLIST directory in which playlist files (e.g., \*.mpls) are stored, a CLIPINF directory in which clip information files (\*.  
5 (\*.clpi) are stored, and a STREAM directory in which MPEG2-formatted A/V stream clip files (\*.m2ts), corresponding to the clip information files, are stored.

The STREAM directory includes MPEG2-formatted A/V stream files called clips or clip files. The A/V stream includes source  
10 packets of video and audio data. For example, a source packet of video data includes a header and a transport packet. A source packet includes a source packet number, which is generally a sequentially assigned number that serves as an address for accessing the source packet. Transport packets include a packet identifier (PID). The  
15 PID identifies the sequence of transport packets to which a transport packet belongs. Each transport packet in the sequence will have the same PID.

The CLIPINF directory includes a clip information file associated with each A/V stream file. The clip information file  
20 indicates, among other things, the type of A/V stream associated therewith, sequence information, program information and timing information. The sequence information describes the arrival time basis (ATC) and system time basis (STC) sequences. For example, the sequence information indicates, among other things, the number  
25 of sequences, the beginning and ending time information for each sequence, the address of the first source packet in each sequence and the PID of the transport packets in each sequence. A sequence of source packets in which the contents of a program is constant is called a program sequence. The program information indicates,  
30 among other things, the number of program sequences, the starting address for each program sequence, and the PID(s) of transport packets in a program sequence.

The timing information is referred to as characteristic point

information (CPI). One form of CPI is the entry point (EP) map. The EP-map maps a presentation time stamp (e.g., on an arrival time basis (ATC) and/or a system time basis (STC)) to a source packet address (i.e., source packet number). The presentation time stamp  
5 (PTS) and the source packet number (SPN) are related to an entry point in the AV stream; namely, the PTS and its related SPN point to an entry point on the AV stream. The packet pointed to is often referred to as the entry point packet.

The PLAYLIST directory includes one or more playlist files.  
10 The concept of a playlist has been introduced to promote ease of editing/assembling clips for playback. A playlist file is a collection of playing intervals in the clips. Each playing interval is referred to as a playitem. The playlist file, among other things, identifies each playitem forming the playlist, and each playitem,  
15 among other things, is a pair of IN-point and OUT-point that point to positions on a time axis of the clip (e.g., presentation time stamps on an ATC or STC basis). Expressed another way, the playlist file identifies playitems, each playitem points to a clip or portion thereof and identifies the clip information file  
20 associated with the clip. The clip information file is used, among other things, to map the playitems to the clip of source packets.

The general information files (not shown) provide general information for managing the reproduction of the A/V streams recorded on the optical disk.

25 In addition to illustrating the data structure of the recording medium according to an embodiment of the present invention, Fig. 1 represents the areas of the recording medium. For example, the general information files are recorded in one or more general information areas, the playlist directory is recorded  
30 in one or more playlist directory areas, each playlist in a playlist directory is recorded in one or more playlist areas of the recording medium, etc. Fig. 2 illustrates an example of a recording medium having the data structure of Fig. 1 stored thereon. As shown, the



recording medium includes a file system information area, a data base area and an A/V stream area. The data base area includes a general information file and playlist information area and a clip information area. The general information file and playlist information area have the general information files recorded in a general information file area thereof, and the PLAYLIST directory and playlist files recorded in a playlist information area thereof. The clip information area has the CLIPINFO directory and associated clip information files recorded therein. The A/V stream area has the A/V streams for the various titles recorded therein.

Video and audio data are typically organized as individual titles; for example, different movies represented by the video and audio data are organized as different titles. Furthermore, a title may be organized into individual chapters in much the same way a book is often organized into chapters.

Because of the large storage capacity of the newer, high-density recording media such as BD-ROM and BD-RE optical disks, different titles, various versions of a title or portions of a title may be recorded, and therefore, reproduced from the recording media. For example, video data representing different camera angles may be recorded on the recording medium. As another example, versions of title or portions thereof associated with different languages may be recorded on the recording medium. As a still further example, a director's version and a theatrical version of a title may be recorded on the recording medium. Or, an adult version, young adult version and young child version (i.e., different parental control versions) of a title or portions of a title may be recorded on the recording medium. Each version, camera angle, etc. represents a different reproduction path, and the video data in these instances is referred to as multiple reproduction path video data.

Because of the large storage capacity of the newer, high-density recording media such as BD-ROM still images may be recorded and reproduced in an organized and/or user interactive

fashion, for example, as slideshows. The data structure for managing reproduction of still images for a high-density optical disk in accordance with embodiments of the present invention will be described along with methods and apparatuses according to  
5 embodiments of the present invention for recording and reproducing still images.

Fig. 3 illustrates a method of managing still images for a high-density optical disk in accordance with one embodiment of the invention. In this embodiment, a plurality of still images  
10 are recorded as a still image file on a BD-ROM and the plurality of still images stored in the still image file are linked to specific navigation information of a playlist including navigation information for playback control of still images. The specific navigation information linked to the still images is  
15 linked to specific movie video data contained in a clip A/V stream storing movie video and audio data.

As depicted in Fig. 3, a plurality of still images can be linked to one recording position. The plurality of still images can be displayed in various ways, for example, by a sequential,  
20 a random/shuffle, or an automatic/manual slideshow. The various display options will be described in greater detail below.

Fig. 4 illustrates a method of managing still images for a high-density optical disk in accordance with another exemplary embodiment of the invention. This embodiment is the same as the  
25 embodiment of Fig. 3 except the clip A/V stream only contains audio data. In this case, while playing the audio data, the optical disk reproducing apparatus detects still images linked to specific recording positions of the audio data and performs a still operation that outputs the detected still images together with  
30 the audio data.

According to the embodiments of the present invention, movie data (e.g., video or video and audio) and still images or audio data and still images may be provided to a user through, for

example, a television set connected to an optical disk reproducing apparatus such as discussed in detail below. Methods of managing navigation information for linking still images to the movie or audio data will now be described in detail.

5        Fig. 5A illustrates one exemplary method of managing still images in accordance with an exemplary embodiment of the invention. In this embodiment, one or more playlist marks are defined for managing still images. As shown in Fig. 5A, a still image or a group of still images is linked to a playlist by a playlist mark,  
10 referred to as a still mark. In this manner, the still images may be managed as a slideshow as described in more detail below. The playlist marks are described in greater detail below with respect to Figs. 6-7.

      Fig. 6 illustrates one exemplary embodiment of the  
15 navigation information for still images provided by associated playlist marks. A playlist file includes a playlist mark information field called 'PlayList Mark'. As shown in Fig. 6, the playlist mark 'PlayListsMark' information field indicates a length of the information field and a number of the playlist marks  
20 'number\_of\_PlayList\_marks' in the playlist. In case of the BD-RE, the 'length' field has a value of '26 bytes'. In case of the BD-ROM in accordance with the invention the length field may have a value greater than 26 bytes. For each playlist mark, the playlist mark 'PlayListsMark' information field indicates the mark type  
25 'mark\_type', a time stamp 'mark\_time\_stamp', duration 'duration', maker's information 'makers\_information', and maker's name 'maker\_name'.

      The mark type indicates the type of mark. For example, when a mark indicates the beginning of a chapter, the mark type  
30 'mark\_type' identifies the associated mark as a chapter mark. As further shown in Fig. 6, if a mark is of the still type, then an index number of the associated still image or images recorded on the BD-ROM 'ref\_to\_still\_image\_index' is provided.

The time stamp 'mark\_time\_stamp' of the mark indicates a point where the mark is placed; namely, indicates a point on a time axis of the A/V stream of clips (e.g., ATC and/or STC basis) where the mark is placed. The 'duration' indicates the length of the mark  
5 that starts from the time stamp indicated by the 'mark\_time\_stamp'. If the mark is a still mark, then the duration 'duration' may indicate a length of time to display the still image.

The maker's information 'maker\_information' provides information supplied by the maker, and the maker's name  
10 'maker\_name' gives the maker's name.

As demonstrated from the description of Fig. 6, when a mark is a still mark, the information associated with the still mark provides navigation information for reproducing the still image associated with the still mark.

15 Fig. 7A illustrates another exemplary embodiment of the navigation information for still images provided by associated playlist marks. As shown, this embodiment is the same as the embodiment of Fig. 6 except that if the mark is a still mark (e.g., mark type =0x10) then additional information regarding the  
20 reproduction of the still image or images is provided in association with the still mark. Specifically, the following indicator fields are provided: an indicator of the number of still images associated with the still mark 'number\_of\_still\_images', an indicator of the display timing 'display\_timing\_mode', an  
25 indicator of the display order 'display\_order\_mode', an indicator of the display effect 'display\_effect\_mode' and an indicator of the period for the display effect 'display\_effect\_period'.

If the 'display\_timing\_mode' field is '0', it indicates an automatic slide show. If the 'display\_timing\_mode' field is '1',  
30 it indicates a browsable still or slideshow operation, which displays still images based on key input by a user. If the 'display\_order\_mode' field is '0', it indicates a sequential still operation in which the still images are to be displayed

sequentially. If the 'display\_order\_mode' field is '1', it indicates a random still operation in which the still images are to be displayed in a random manner.

The 'display\_effect\_mode' indicates the effect to be applied to the still image such as cut-in/cut-out or fade-in/fade-out. The 'display\_effect\_period' field indicates the time duration for which the corresponding display effect is valid. The fields of 'display\_timing\_mode', 'display\_order\_mode', 'display\_effect\_mode' and 'display\_effect\_period' can be defined and managed for each still image.

In the case where a plurality of still images are linked, the 'ref\_to\_still\_index' field indicative of the index number of a still image is defined as the index number of the last still image or the number of linked still images. If only one still image is linked, the 'ref\_to\_still\_index' is defined to be '0xFFFF'.

As a further alternative, the embodiment of Fig. 7A may be provided without including the 'ref\_to\_still\_index' field.

Fig. 5B illustrates a method of managing still images in accordance with an exemplary embodiment of the invention that is the same as Fig. 5A, except that playlist marks may also be defined as movie marks. Movie marks are used for management of video presentation units (VPUs). A prescribed recording block of a clip of an A/V stream wherein both video and audio data are recorded or only video data are recorded is assigned as a video presentation unit (VPU). A VPU can be recorded and managed as a separate file. Navigation information may be recorded and managed so as to display a still image or video of a VPU at a particular position where display of a slideshow is desired, for example, such as in the middle of displaying motion video.

Fig. 7B illustrates an exemplary embodiment of the navigation information for still images and VPUs provided by associated playlist marks. This embodiment is the same as Fig.

7A, except that if the mark is a movie mark (e.g., mark type = 0x11) then additional information regarding the reproduction of a VPU is provided in association with the movie mark. Specifically, the following indicator fields are provided: 'VPU\_Clip\_file\_name' to  
5 provide the clip file name of the VPU, the 'VPU\_start\_TM' and 'VPU\_end\_TM' information to select and play the specified recording block of the VPU, 'VPU\_data\_size' information to indicate of the data record size of the VPU, and 'VPU\_info' to provide information about the attributes of video data recorded  
10 in the VPU.

Fig. 7C illustrates another example embodiment of the playlist mark information field. As shown, this embodiment is the same as the embodiment of Fig. 7B except the navigation information for still images is not included.

15 Fig. 8A illustrates another exemplary embodiment of a method of managing still images according to the present invention. In this embodiment, navigation information such as the display time and display method of a still image or a group of still images are provided by one or more still indicators. As shown, a still  
20 indicator links one or a group of still images with a clip AV stream. The clip A/V stream may contain movie video and audio data together or only audio data. The still images may be stored in a single image file or each still image may be stored in an individual image file.

25 As illustrated in Fig. 9A, the still indicator 'PlayListStillIndicator' is a new information field added to a playlist file 'PlayList\_File'. This new information field indicates a length of the information field and a number of the playlist stills 'number\_of\_PlayList\_stills'. For each playlist  
30 still, the playlist indicator 'PlayListStillIndicator' information field indicates a time stamp 'still\_time\_stamp', a start index number of the associated still image(s) recorded on the BD-ROM 'ref\_to\_still\_start\_index', and a number of still

images 'number\_of\_still\_images.'

The time stamp 'still\_time\_stamp' of the playlist still indicates a point where the playlist still is placed; namely, indicates a point on a time axis of the A/V stream of clips (e.g.,  
5 ATC and/or STC basis) where the playlist still is placed.

Furthermore, as shown in Fig. 9A, for each still image associated with a playlist still, the following information is provided: a duration 'duration' to display the still image, an indicator of the display timing 'display\_timing\_mode', an  
10 indicator of the display order 'display\_order\_mode', an indicator of the display effect 'display\_effect\_mode' and an indicator of the period for the display effect 'display\_effect\_period'. These indicators were defined above with respect to Fig. 7A.

Fig. 8B illustrates another exemplary embodiment of a method  
15 of managing still images and VPUs according to the present invention. In this embodiment, navigation information such as the display time and display method of a still image or a group of still images and/or VPUs are provided by one or more slideshow indicators. As shown, a slideshow indicator links one or a group  
20 of still images with a clip AV stream, or links a VPU with a clip AV stream. The clip A/V stream may contain movie video and audio data together or only audio data. The still images may be stored in a single image file or each still image may be stored in an individual image file.

25 As illustrated in Fig. 9B, the slideshow indicator 'PlayListSlideshowIndicator' is a new information field added to a playlist file 'PlayList\_File'. This new information field indicates a length of the information field and a number of slideshow object 'number\_of\_slideshow\_objects'. For each  
30 slideshow object, the slideshow indicator indicates a time stamp 'still\_time\_stamp'. The time stamp 'still\_time\_stamp' indicates a point where the slideshow object is placed; namely, indicates a point on a time axis of the A/V stream of clips (e.g., ATC and/or

STC basis) where the slideshow object is placed.

If the slideshow object is a still image, a start index number of the associated still image(s) recorded on the BD-ROM 'ref\_to\_still\_start\_index', and a number of still images  
5 'number\_of\_still\_images' are provided. Furthermore, as shown in Fig. 9B, for each still image associated with a playlist still, the following information is provided: a duration 'duration' to display the still image, an indicator of the display timing 'display\_timing\_mode', an indicator of the display order 'display  
10 \_order\_mode', an indicator of the display effect 'display\_effect\_mode' and an indicator of the period for the display effect 'display\_effect\_period'. These indicators were defined above with respect to Fig. 7A.

If the slideshow object is a VPU, then the  
15 'VPU\_Clip\_file\_name' information to identify the clip file of said VPU, 'VPU\_start\_TM' and 'VPU\_end\_TM' information to select and play the specified recording block of the VPU, 'VPU\_data\_size' information about data record size of the VPU, and 'VPU\_info' information about the attributes of video data recorded in the  
20 VPU are included and recorded.

Fig. 10 illustrates another exemplary embodiment of a method for managing still images according to the present invention. In this embodiment, playitems are used to manage one or more still images. For example, as shown, some playitems manage movie video  
25 and audio data or only audio data and some playitems manage a still image, a group of still images or slideshow (or portion of a slideshow), and have been labeled still playitems.

The clip A/V stream corresponding to the playlist may contain movie video and audio data together or only audio data.  
30 The still images may be stored in a single image file or each still image may be stored in an individual image file. The playitems of the playlist provide navigation information linking the still images and the clip A/V stream. As will be appreciated, the still



images and, for example, the audio data are recorded in separate files and managed by separate files. In this manner, the still images and audio data may be reproduced together but independently. This permits, for example, continuously loop through (i.e.,  
5 repeating) the clip of audio data linked with still images forming a slideshow while the still images are presented.

Fig. 11A illustrates an exemplary embodiment of the playitem information field according to the present invention. The playitem 'PlayItem' information field indicates a length of the  
10 information field, and indicates the name of the clip information file 'Clip\_Information\_File\_Name' associated with the playitem.

The playitem information field also includes an indicator 'Clip\_codec-identifier' indicating whether the playitem is a still playitem and associated with one or more still images. For  
15 example, the 'Clip\_codec\_identifier' field may indicate the encoding format of a still image such as 'JPEG', which then serves to indicate that the playitem is a still playitem for still image display.

If the CPI type given in the clip information file associated  
20 with the playitem is an EP map type signified by CPI type = 1, then the playitem includes an STC reference 'ref\_to\_STC-id' on the clip indicated by the clip information file name 'Clip-Information\_file\_name'.

The playitem also includes IN\_time and OUT\_time fields. The  
25 'IN\_time' field takes up 2 bytes and indicates the index number of the first still image among the linked still images stored in the still image file and the 'OUT-time' field indicates the index number of the last still image among the linked still images.

Furthermore, as shown in Fig. 11A, if the playitem is a still  
30 playitem, then the number of still images 'number\_of\_still\_images' is provided; and for each still image, the following information is provided: a duration 'duration to display the still image, an indicator of the display timing 'display\_timing\_mode', an

indicator of the display order 'display\_order\_mode', an indicator of the display effect 'display\_effect\_mode' and an indicator of the period for the display effect 'display\_effect\_period'. These indicators were defined above with respect to Fig. 7A.

5 As will be appreciated, even though not shown in Fig. 10, a playitem may also serve as a VPU playitem. Fig. 11B illustrates an exemplary embodiment of a VPU playitem. Here, the clip codec identifier identifies the playitem as a VPU playitem, and provides the same VPU information discussed above with respect to movie  
10 marks and VPU slideshow objects.

Fig. 12A illustrates another exemplary embodiment of a method for managing still images according to the present invention. In this embodiment, sub-playitems are used to manage one or more still images, while movie data (e.g., audio and video  
15 data) or only audio data is managed using playitems. The sub-playitem indicates a sub-path in a playlist.

In this method, a still image or a group of still images stored in a still image file is linked to a sub-playitem included in a playlist. The clip A/V stream corresponding to the playlist  
20 may contain movie video and audio data together or only audio data. The still images may be stored in a single image file or each still image may be stored in an individual image file. As will be appreciated, the still images and, for example, the audio data are recorded in separate files and managed by separate files. In  
25 this manner, the still images and audio data may be reproduced together but independently. This permits, for example, continuously loop-through (i.e., repeating) the clip of audio data linked with still images forming a slideshow while the still images are presented.

30 Fig. 13A illustrates an exemplary embodiment of the sub-playitem information field according to the present invention. The sub-playitem 'SubPlayItem' information field indicates a length of the information field, and indicates the name of the clip

information file 'Clip\_Information\_File\_Name' associated with the sub-playitem.

The sub-playitem information field also includes an indicator 'Clip\_codec-identifier' and a type indicator

- 5 'SubPlayItem\_type' both indicating whether the playitem is a still playitem and associated with one or more still images. For example, the 'Clip\_codec\_identifier' field may indicate the encoding format of a still image such as 'JPEG', which then serves to indicate that the playitem is a still playitem for still image
- 10 display. With respect to the type indicator 'SubPlayItem\_type', if the type indicator 'SubPlayItem\_type' equals, for example, "2", then this indicates the sub-playitem is associated with a sub-path for displaying one or more associated still images.

- The sub-playitem also includes IN\_time and OUT\_time fields.
- 15 The 'IN\_time' field takes up 2 bytes and indicates the index number of the first still image among the linked still images stored in the still image file and the 'OUT-time' field indicates the index number of the last still image among the linked still images.

- The sub-playitem further includes an STC reference
- 20 'ref\_to\_STC\_id' for the clip indicated by the clip information file name 'Clip-Information\_file\_name', an id of the playitem containing this sub-playitem 'sync\_Playitem\_id', and an indication 'Sync\_start\_PTS\_of\_PlayItem' of a presentation-time in the playitem indicated by the 'sync\_Playitem\_id.'

- 25 Furthermore, as shown in Fig. 13A, if the playitem is a still playitem, then the number of still images 'number\_of\_still\_images' is provided; and for each still image, the following information is provided: a duration 'duration' to display the still image, an indicator of the display timing 'display\_timing\_mode', an
- 30 indicator of the display order 'display\_order\_mode', an indicator of the display effect 'display\_effect\_mode' and an indicator of the period for the display effect 'display\_effect\_period'. These indicators were defined above with respect to Fig. 7A.

In an alternative embodiment, the movie video and audio data or only audio is managed by a sub-playitem and the still image, images or slideshow (or portion thereof) is managed by a playitem.

Fig. 12B illustrates an exemplary embodiment of the present invention that is the same as the embodiment of Fig. 12A, except that a sub-playitem may also serve as a VPU sub-playitem to manage reproduction of a VPU.

Fig 13B illustrates an exemplary embodiment of a sub-playitem according to the embodiment of Fig. 12B. As shown the sub-playitem embodiment of Fig. 13B is the same as the embodiment of Fig. 12B, except that if the clip codec identifier and/or sub-playitem type indicator indicate the sub-playitem is a VPU sub-playitem, then the sub-playitem further indicates the size of the VPU and information about the attributes of video data recorded in the VPU. For example, with respect to the type indicator 'SubPlayItem\_type', if the type indicator 'SubPlayItem\_type' equals, for example, "3", then this indicates the sub-playitem is associated with a sub-path for displaying a VPU.

Next, embodiments of a method for recording still information packets for allowing detection of still display positions will be described in detail. Fig. 14A illustrates a method of recording still information packets for identifying still image display positions in accordance with one embodiment the present invention. In this method, source packets recorded at still display start and still display end positions contained in the clip A/V stream, which is pointed to by at least one type of navigation information among still marks, still indicators, still playitems, and sub-playitems, are defined as still information packets for identifying groups of still images.

A still information packet comprises a 4-byte TP (transport packet) extra header and a 188-byte MPEG2 TP (transport packet). The MPEG2 TP further comprises a packet header and a payload. As depicted in Fig. 14A, the still information including fields of

'still\_start\_end\_flag', 'number\_of\_images', and 'display\_info' recorded in the payload.

For example, if the 'still\_start\_end\_flag' field is '0', it indicates the still display start position. If this field is '1',  
5 it indicates the still display end position. The 'number\_of\_images' field is only meaningful at the display start position and 'display\_info' field stores the display order, the display effect, and the display effect period, etc.

If the decoding operation in a VDP system such as shown in  
10 Fig. 16 detects a source packet having still information, that is, a still information packet while playing movie video and/or audio data recorded in the clip A/V stream, the optical disk reproducing apparatus displays the still image after stopping playing of the movie video data or displays the still image with  
15 playing audio data.

Referring to the 'still\_start\_end\_flag', the VDP system starts or stops display of the still image. Two different types of packets, a still start packet and a still end packet, may be recorded at the still display start and end positions,  
20 respectively.

Fig. 14B illustrates a method of recording slideshow information packets for identifying slideshow display positions in accordance with one embodiment of the present invention. In this method, source packets recorded at slideshow display start and  
25 slideshow display end positions contained in the clip A/V stream, which is pointed to by at least one type of navigation information among playlist marks, still indicators, slideshow indicators, playitems, and sub-playitems, are defined as slideshow information packets for identifying groups of still images.

30 A slideshow information packet comprises a 4-byte TP (transport packet) extra header and a 188-byte MPEG2 TP (transport packet). The MPEG2 TP further comprises a packet header and a payload. As depicted in Fig. 14B, the slideshow information

include the field of 'slideshow\_start\_end\_flag', the fields of 'number\_of\_images', and 'display\_info' if the slideshow information packet is a still image information packet, and the fields of duration of the VPU and data size of the VPU if the  
5 slideshow information packet is a VPU information packet.

If the decoding operation in a VDP system such as shown in Fig. 16 detects a source packet having slideshow information, that is, a slideshow information packet while playing movie video and/or audio data recorded in the clip A/V stream, the optical  
10 disk reproducing apparatus displays the still image or VPU after stopping playing of the movie video data or displays the still image with playing audio data.

Referring to the 'still\_start\_end\_flag', the VDP system starts or stops display of the still image. Two different types  
15 of packets, a still start packet and a still end packet, may be recorded at the still display start and end positions, respectively.

Fig. 15 illustrates a method of recording still information packets for identifying still image display positions in  
20 accordance with another embodiment of the invention. In this method, still information packets are added to display positions of all the still images contained in the clip A/V stream, which is pointed to by the navigation information employing at least one type among still marks, still indicators, still playitems,  
25 or sub-playitems. In this embodiment, still images can be detected by the still information packets.

As described above, the still information packet contains still information including the fields of 'still\_start\_end\_flag' and 'display\_info'. The 'display\_info' field includes the display  
30 order, the display effect, and the display effect period, etc.

If the decoding operation in a VDP system such as shown in Fig. 16 detects a source packet having the still information, that is, a still information packet while playing movie video and/or

audio data recorded in the clip A/V stream, the optical disk reproducing apparatus displays the still image after stopping playing of the movie video data or displays the still image with playing audio data.

- 5        The still information packet may be added to both the still image start and end positions. Referring to the 'still\_start\_end\_flag', the VDP system starts or stops display of the still image. Two different types of packets, a still start packet and a still end packet, may be recorded at the still display  
10 start and end positions, respectively.

An optical disk reproducing apparatus outputs movie data and still images or audio data and still images to, for example, a connected television set by referring to navigation information according to the present invention such as still marks, still  
15 indicators, slideshow indicators, still playitems, and sub-playitems. Fig. 16 illustrates a schematic diagram of an embodiment of an optical disk recording and reproducing apparatus according to the present invention. As shown, an AV encoder 9 receives and encodes data (e.g., movie video and audio data, only  
20 audio data, and/or still image data). The AV encoder 9 outputs the encoded data along with coding information and stream attribute information. A multiplexer 8 multiplexes the encoded data based on the coding information and stream attribute information to create, for example, an MPEG-2 transport stream. A source  
25 packetizer 7 packetizes the transport packets from the multiplexer 8 into source packets in accordance with the audio/video format of the optical disk. As shown in Fig. 14, the operations of the AV encoder 9, the multiplexer 8 and the source packetizer 7 are controlled by a controller 10. The controller 10 receives user  
30 input on the recording operation, and provides control information to AV encoder 9, multiplexer 8 and the source packetizer 7. For example, the controller 10 instructs the AV encoder 9 on the type of encoding to perform, instructs the multiplexer 8 on the

transport stream to create, and instructs the source packetizer 7 on the source packet format. The controller 10 further controls a drive 3 to record the output from the source packetizer 7 on the optical disk.

5       The controller 10 also creates the navigation and management information for managing reproduction of the data being recorded on the optical disk. For example, based on information received via the user interface (e.g., instruction set saved on disk, provided over an intranet or internet by a computer system, etc.)  
10       the controller 10 controls the drive 3 to record one or more of the data structures of Figs. 1-15 on the optical disk.

During reproduction, the controller 10 controls the drive 3 to reproduce this data structure. Based on the information contained therein, as well as user input received over the user  
15       interface (e.g., control buttons on the recording and reproducing apparatus or a remote associated with the apparatus), the controller 10 controls the drive 3 to reproduce the data from the optical disk. For example, as discussed above with respect to the embodiments of the present invention, a still image or still images  
20       may be reproduced in association with movie video and audio data or only audio data based on the navigation information. Furthermore, an image or group of images may be reproduced as a slideshow or portion of a slideshow. As also discussed, a slideshow may be synchronized, browsable, etc.

25       The reproduced source packets are received by a source depacketizer 4 and converted into a data stream (e.g., an MPEG-2 transport packet stream). A demultiplexer 5 demultiplexes the data stream into encoded data. An AV decoder 6 decodes the encoded data to produce the original data that was feed to the AV encoder 9.  
30       During reproduction, the controller 10 controls the operation of the source depacketizer 4, demultiplexer 5 and AV decoder 6. The controller 10 receives user input on the reproducing operation, and provides control information to AV decoder 6, demultiplexer



5 and the source packetizer 4. For example, the controller 10 instructs the AV decoder 9 on the type of decoding to perform, instructs the demultiplexer 5 on the transport stream to demultiplex, and instructs the source depacketizer 4 on the source 5 packet format.

While Fig. 16 has been described as a recording and reproducing apparatus, it will be understood that only a recording or only a reproducing apparatus may be provided using those portions of Fig. 16 providing the recording or reproducing 10 function.

Next, some of the different types of slideshows will be described in detail with reference to Figs. 17-20. It will be appreciated that these are merely examples, and the data structure of the present invention provides for other types of slideshows.

15 Figs. 17-19 illustrate examples of synchronized or time-based slideshows. In this example, the display items (VPUs and/or still items) are displayed at a particular point in time. In the examples of Figs. 17-19, the display items are displayed at particular points in time in synchronization with the audio 20 data reproduced from a clip A/V stream. The presentation time and duration of each display item are provided by the navigation information in a playlist. For example, the navigation information includes one or more of a playlist mark, still or slideshow indicator, playitem and sub-playitem as described in 25 detail above. The navigation information for the audio data is supplied by one of a playitem and sub-playitem in the playlist. The navigation information may further indicate whether a sequential or random playback should occur.

Fig. 17 illustrates an example of sequential synchronized 30 playback. Here, the seven display items Display #1-#7, which include VPUs #1 and #2 and still items #1-#5, are displayed at the presentation times indicated with respect to each display item.

Fig. 18 illustrates an example of random playback of the seven display items Display #1-#7. Here, the VDP system obtains the presentation time for each display item from the navigation information, but randomly picks which display item to display at each obtained presentation time. Fig. 19 illustrates an example where a first portion of playback is sequential and a second portion of playback is random.

Fig. 20 illustrates an example of a browsable slideshow. In a browsable slideshow, each display item is displayed until user input is received that indicates to change from the displayed display item. With a browsable slideshow, the navigation information indicates the duration of, for example, a still image as infinite. The user input received may indicate to proceed to a next display item or a previous display item. When a browsable slideshow is reproduced with audio data as shown in Fig. 20, no synchronization exists between the audio data and the display items. Instead, the audio data is continuously and repeatedly reproduced during the slideshow. As further shown with respect to VPU #1, if a VPU is reproduced as a display item, and reproduction of the VPU completes before user input to change the display item is received, then the last picture of the VPU is maintained as a still image. As with time-based slideshows, the display of display items may be sequential or random. Fig. 20 illustrates a sequential browsable slideshow.

Next, a more detail description of reproducing a browsable slideshow based on the navigation information will be described. As discussed, a browsable slideshow may be reproduced based on playlist marks defined as still marks. In this example, the controller 10 reproduces a playlist, and based on the navigation information in the playlist, the controller 10 reproduces a still image along with, for example, only audio data. The playlist provides navigation information, for example, a playitem or sub-playitem, for the audio data and provides a still mark linking

the still image with the audio data. The controller 10 causes output of the still image until user input instructing the controller 10 to skip to the next or previous still image is received. The controller 10 then reproduces the next or previous still image.

5 This next or previous image may be the next or previous image in a group of images referred to by the still mark, or may be the still image referred to by the next or previous still mark in the playlist. This same browsable slideshow operation may be performed based on still indicators.

10 A browsable slideshow may also be reproduced based on the playitems or sub-playitems defined as still playitems or sub-playitems. Here, the controller 10 reproduces, for example, only audio data referenced by a non-still playitem or sub-playitem in the playlist, and reproduces a still image or one still image  
15 in a group of still images referenced by a still playitem or sub-playitem in the playlist. The controller 10 causes output of the still image until user input instructing the controller 10 to skip to the next or previous still image is received. The controller 10 then reproduces the next or previous still image. This next or  
20 previous image may be the next or previous image in a group of images referred to by the current still playitem or still sub-playitem, or may be the still image referred to by the next or previous still playitem or still sub-playitem in the playlist.

As will be appreciated from the forgoing disclosure, the  
25 present invention provides a recording medium having a data structure for managing still images recorded on a high-density recording medium (e.g., a high-density optical disk such as a BD-ROM). For example, the data structure allows for displaying movie video and still images or audio and still images in various  
30 ways.

As apparent from the above description, the present invention provides methods and apparatuses for recording a data structure on a high density recording medium for managing still images

recorded on the recording medium.

The above description further provides methods and apparatus for reproducing still images recorded on a high density recording medium based on a data structure, also recorded on the high density  
5 recording medium, for managing the reproduction of still images.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art, having the benefit of this disclosure, will appreciate numerous modifications and variations there from. For example, while  
10 described with respect to a Blu-ray ROM optical disk in several instances, the present invention is not limited to this standard of optical disk or to optical disks. It is intended that all such modifications and variations fall within the spirit and scope of the invention.

15

# CLAIMS

1. A recording medium having a data structure for managing reproduction of at least still images recorded on the recording medium, comprising:

5       a data area storing at least one still image in a first file and audio data in a second file; and

          a playlist area storing at least one playlist, the playlist linking the first and second files.

2. The recording medium of claim 1, wherein the playlist  
10 including navigation information providing presentation information regarding the first and second files.

3. The recording medium of claim 2, wherein the playlist includes first navigation information providing presentation information regarding the still image in the first file, and second  
15 navigation information providing presentation information regarding audio data in the second file.

4. The recording medium of claim 3, wherein one of a playitem field and a sub-playitem field provides the first navigation information.

20       5. The recording medium of claim 4, wherein the one of the playitem field and the sub-playitem field includes an indicator indicating that the one of the playitem field and the sub-playitem field provides information for still image presentation.

6. The recording medium of claim 4, wherein the one of the  
25 playitem field and the sub-playitem field includes an indicator indicating a duration for displaying the still image.

7. The recording medium of claim 4, wherein the one of the playitem field and the sub-playitem field includes an indicator indicating whether to display the still image for an infinite  
30 duration.

8. The recording medium of claim 7, wherein the indicator

indicates to display the still image for an infinite duration until user input to change from the still image is received.

9. The recording medium of claim 4, wherein the one of the playitem field and the sub-playitem field includes identifiers  
5 identifying a clip of data including the still image.

10. The recording medium of claim 4, wherein one of a playitem field and a sub-playitem field provides the second navigation information.

11. The recording medium of claim 10, wherein the one of a  
10 playitem field and a sub-playitem field providing the first navigation information is different from the one of a playitem field and a sub-playitem field providing the second navigation information.

12. The recording medium of claim 11, wherein the playlist  
15 further includes mark information, and the mark information includes a mark pointing to the still picture.

13. The recording medium of claim 3, wherein the playlist further includes mark information, the mark information includes a mark pointing to the still picture.

20 14. A recording medium having a data structure for managing reproduction of at least still images recorded on the recording medium, comprising:

a data area storing at least one still image and audio data in separate files;

25 a playlist area including a playlist, the playlist including a first one of a playitem and a sub-playitem that provides navigation information regarding the still image, the playlist including a second one of a playitem and a sub-playitem that provides navigation information regarding the audio data.

30 15. A method of reproducing a data structure for managing reproduction of at least still images recorded on a recording medium, comprising:

reproducing at least one playlist from the recording medium,

the playlist linking first and second files, the first file including at least one still image and the second file including audio data.

16. An apparatus for reproducing a data structure for  
5 managing reproduction of at least still images recorded on a recording medium, comprising:

a driver for driving an optical reproducing device to reproduce data recorded on the recording medium;

a controller for controlling the driver to reproduce at least  
10 one playlist from the recording medium, the playlist linking first and second files, the first file including at least one still image and the second file including audio data.

17. A method of recording a data structure for managing  
reproduction of at least still images recorded on a recording  
15 medium, comprising:

recording a first file including at least one still image and a second file including audio data in the recording medium; and


recording at least one playlist in the recording medium, the playlist linking the first and second files.

20 18. An apparatus for recording a data structure for managing reproduction of at least multiple reproduction path video data on a recording medium, comprising:

a driver for driving an optical recording device to record data on the recording medium;


25 an encoder for encoding at least multiple reproduction path video data; and

a controller for controlling the driver to record a first file including at least one still image and a second file including audio data in the recording medium, and for controlling the driver to  
30 record at least one playlist in the recording medium, the playlist linking the first and second files.

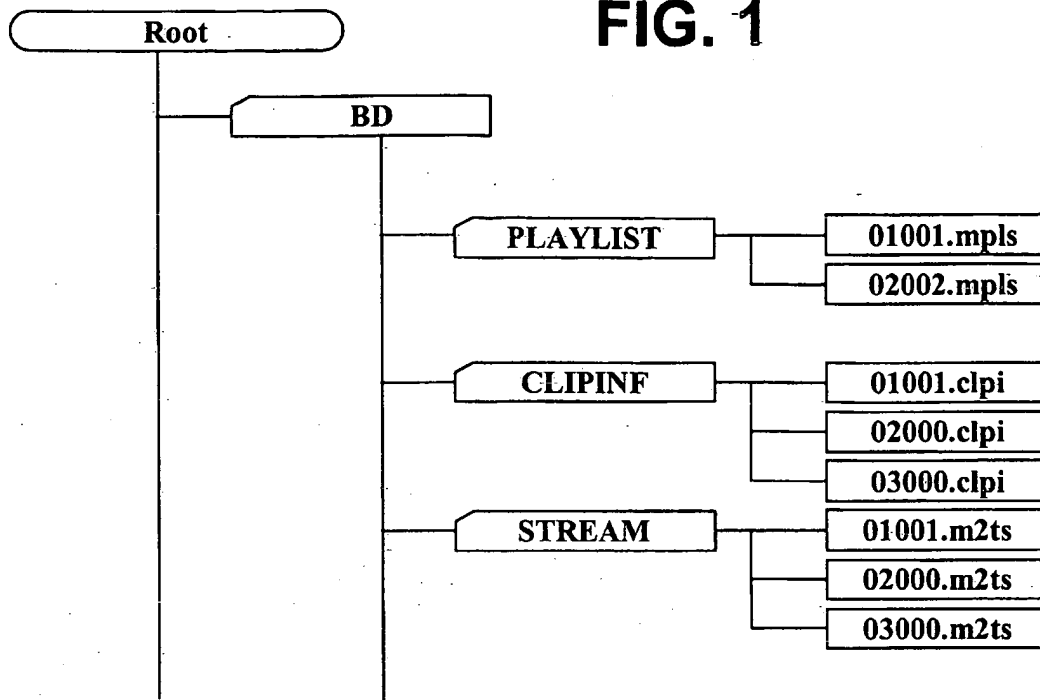
**FIG. 1**




**FIG. 2**

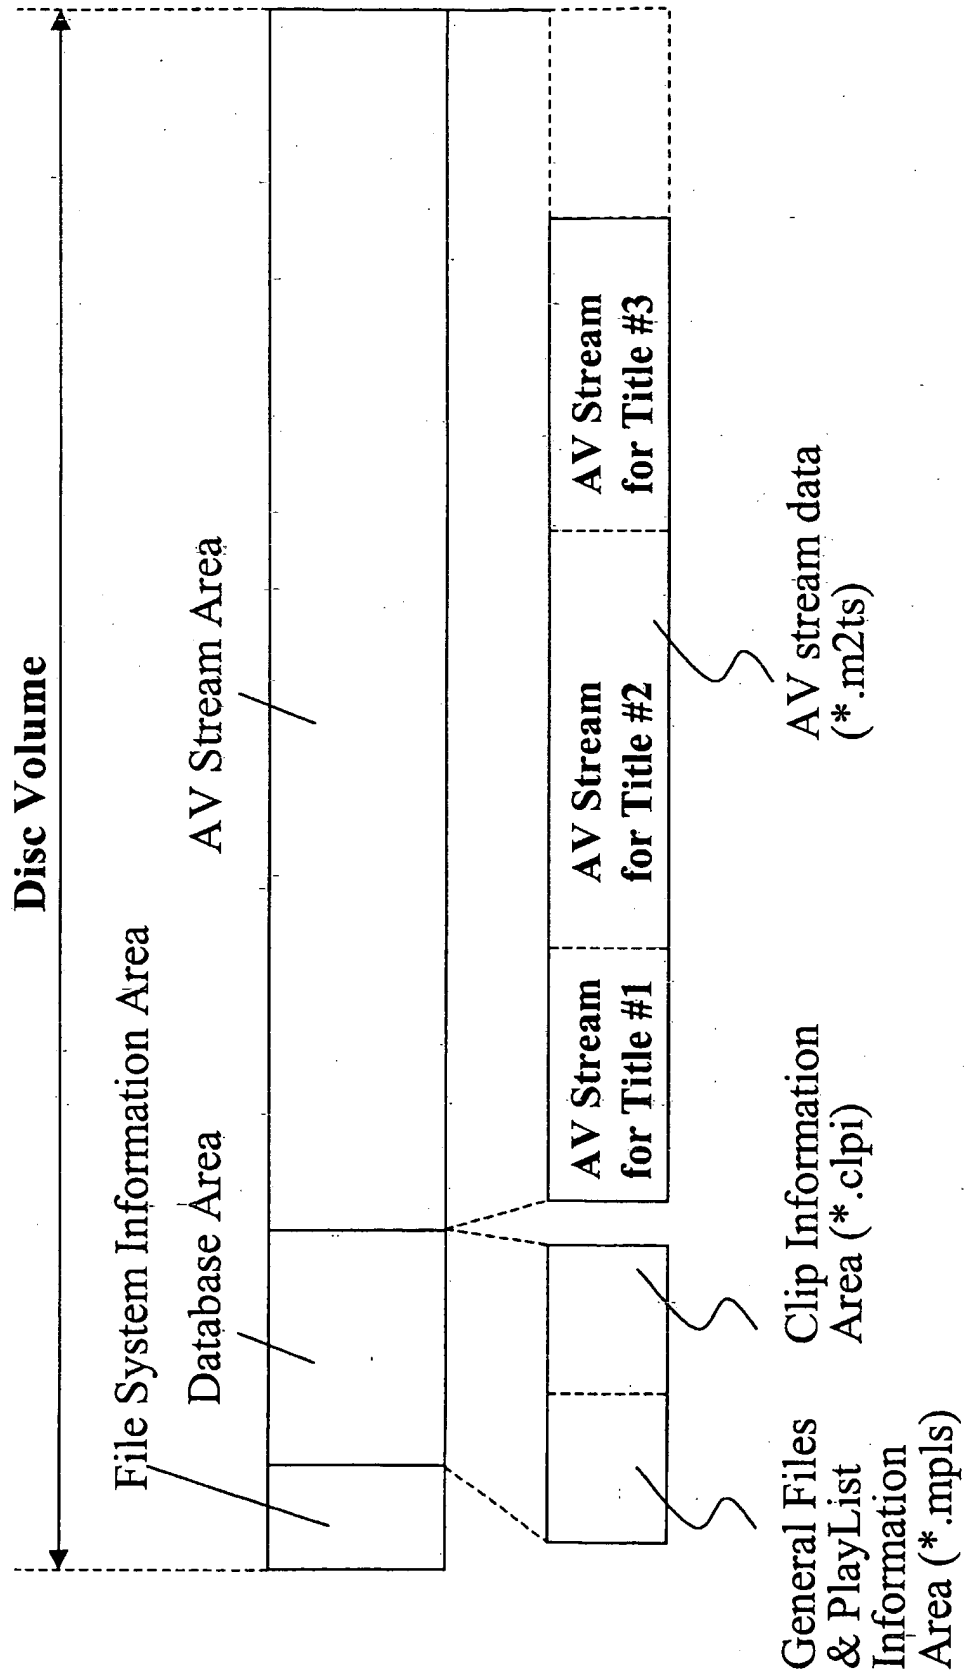

**FIG. 3**

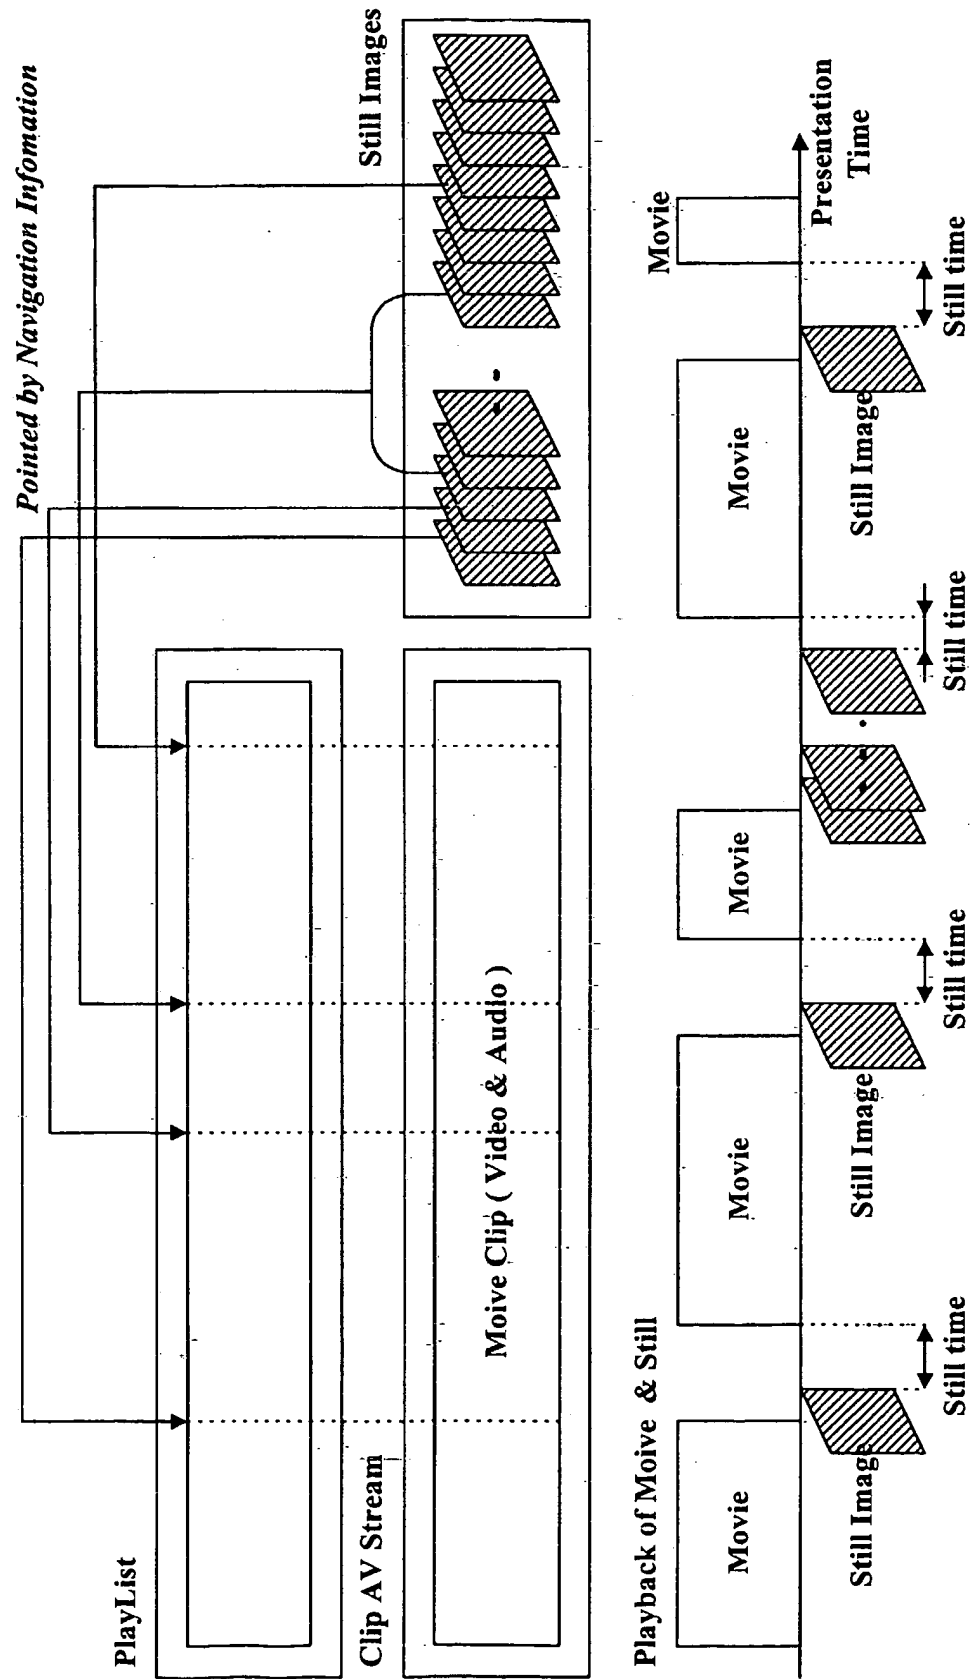


4/26

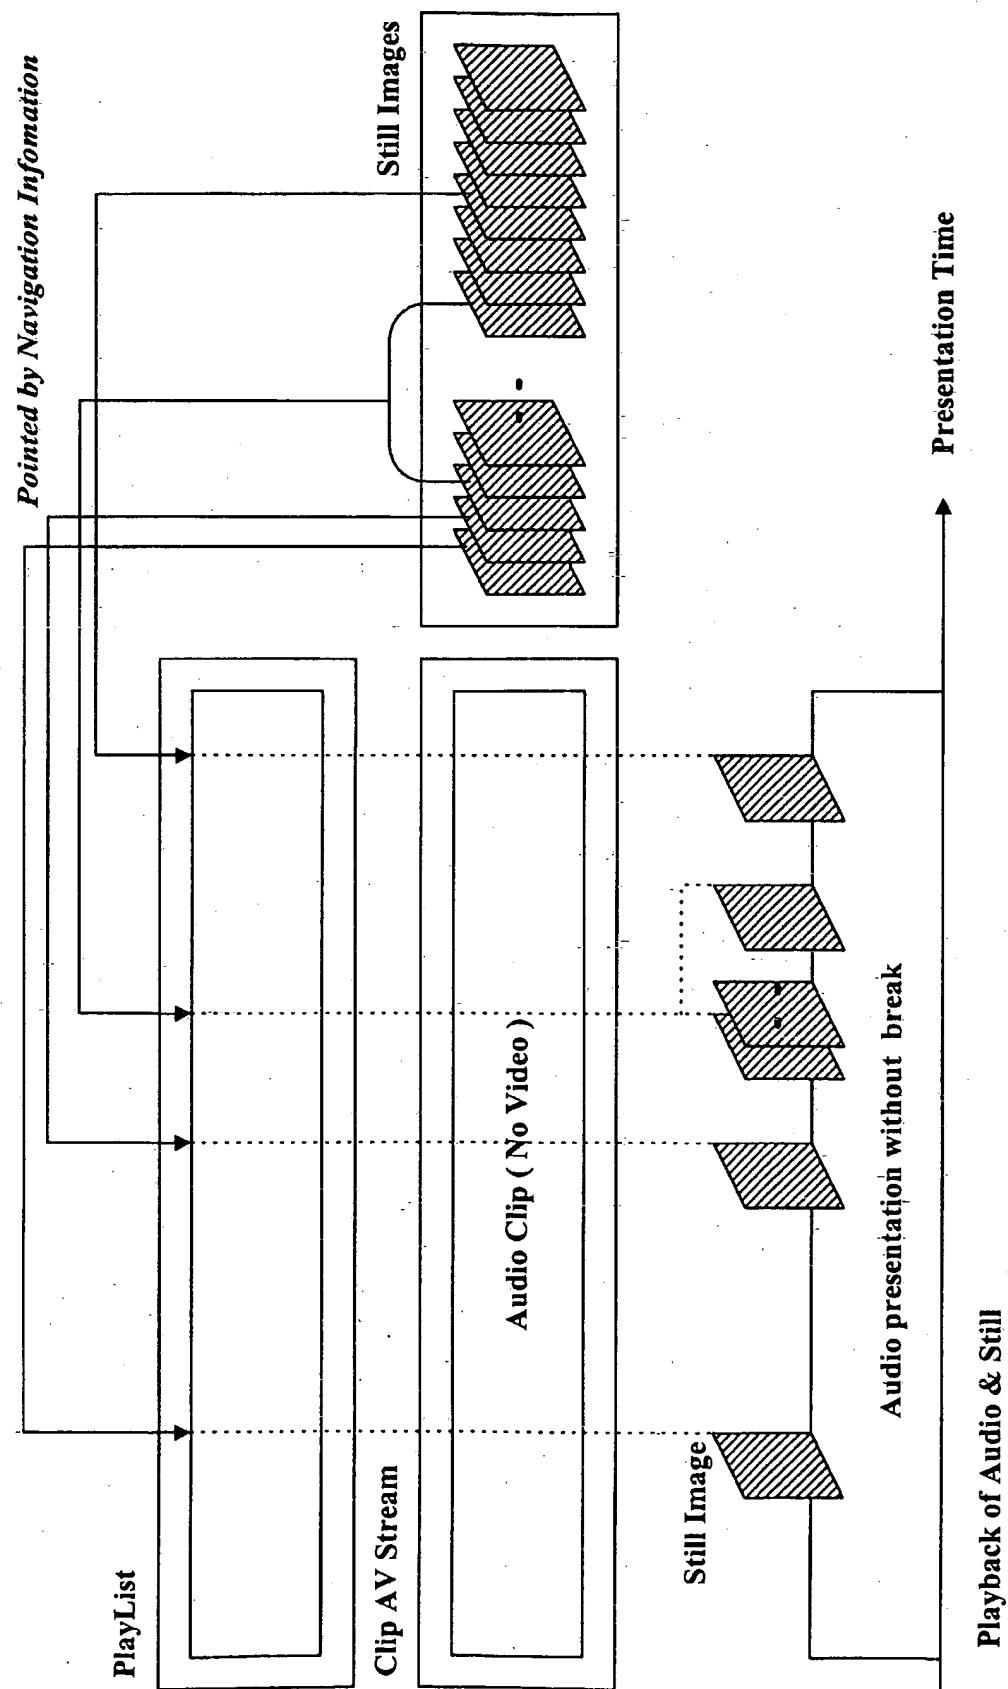**FIG. 4**


5/26

**FIG. 5A**

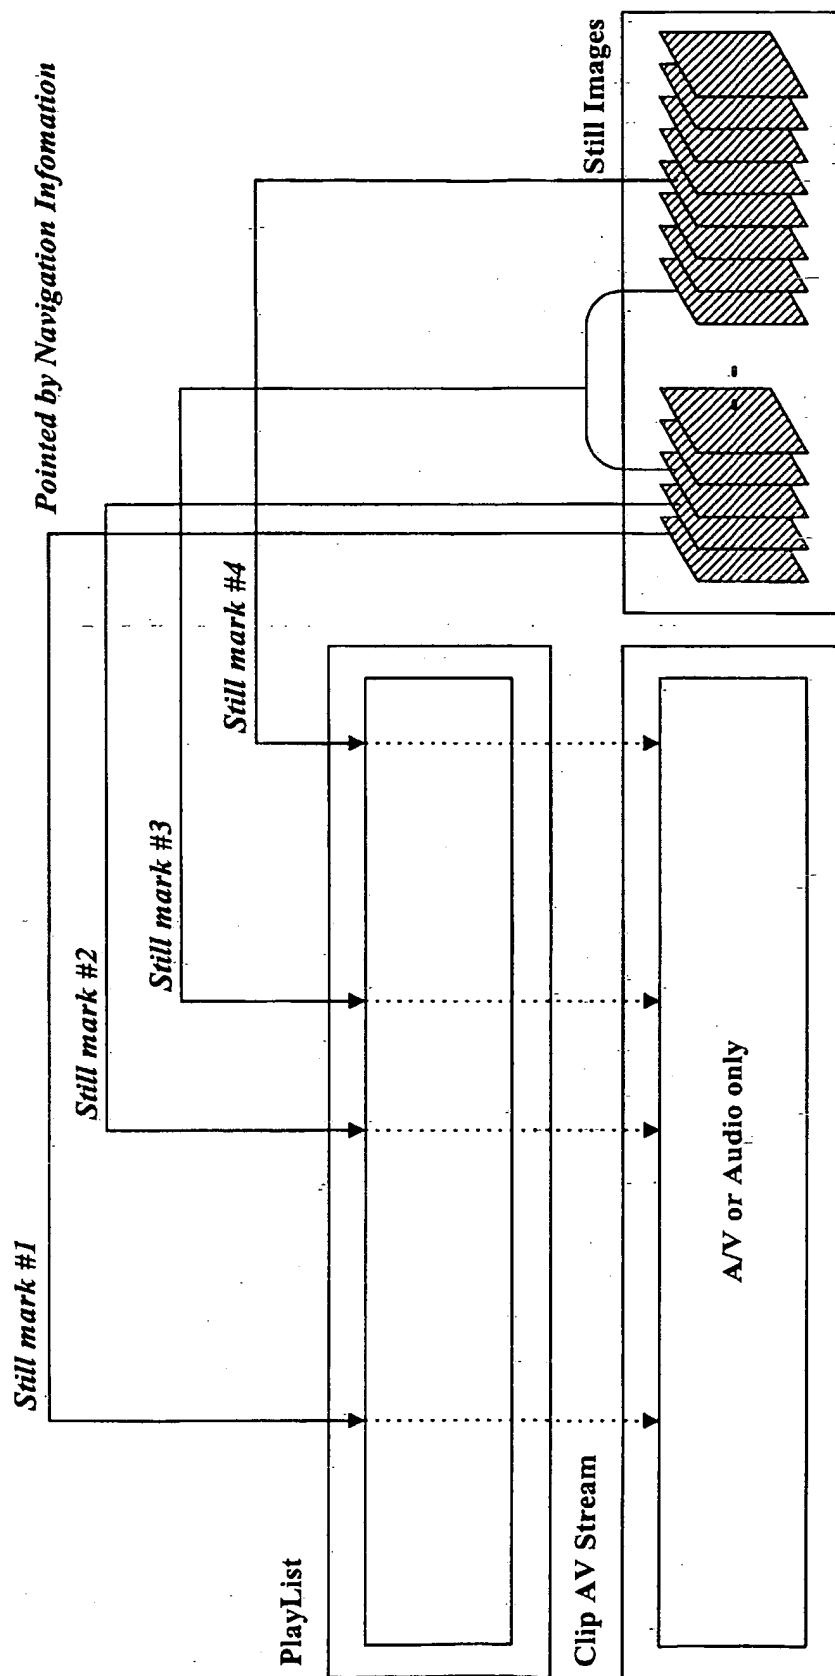

6/26

**FIG. 5B**

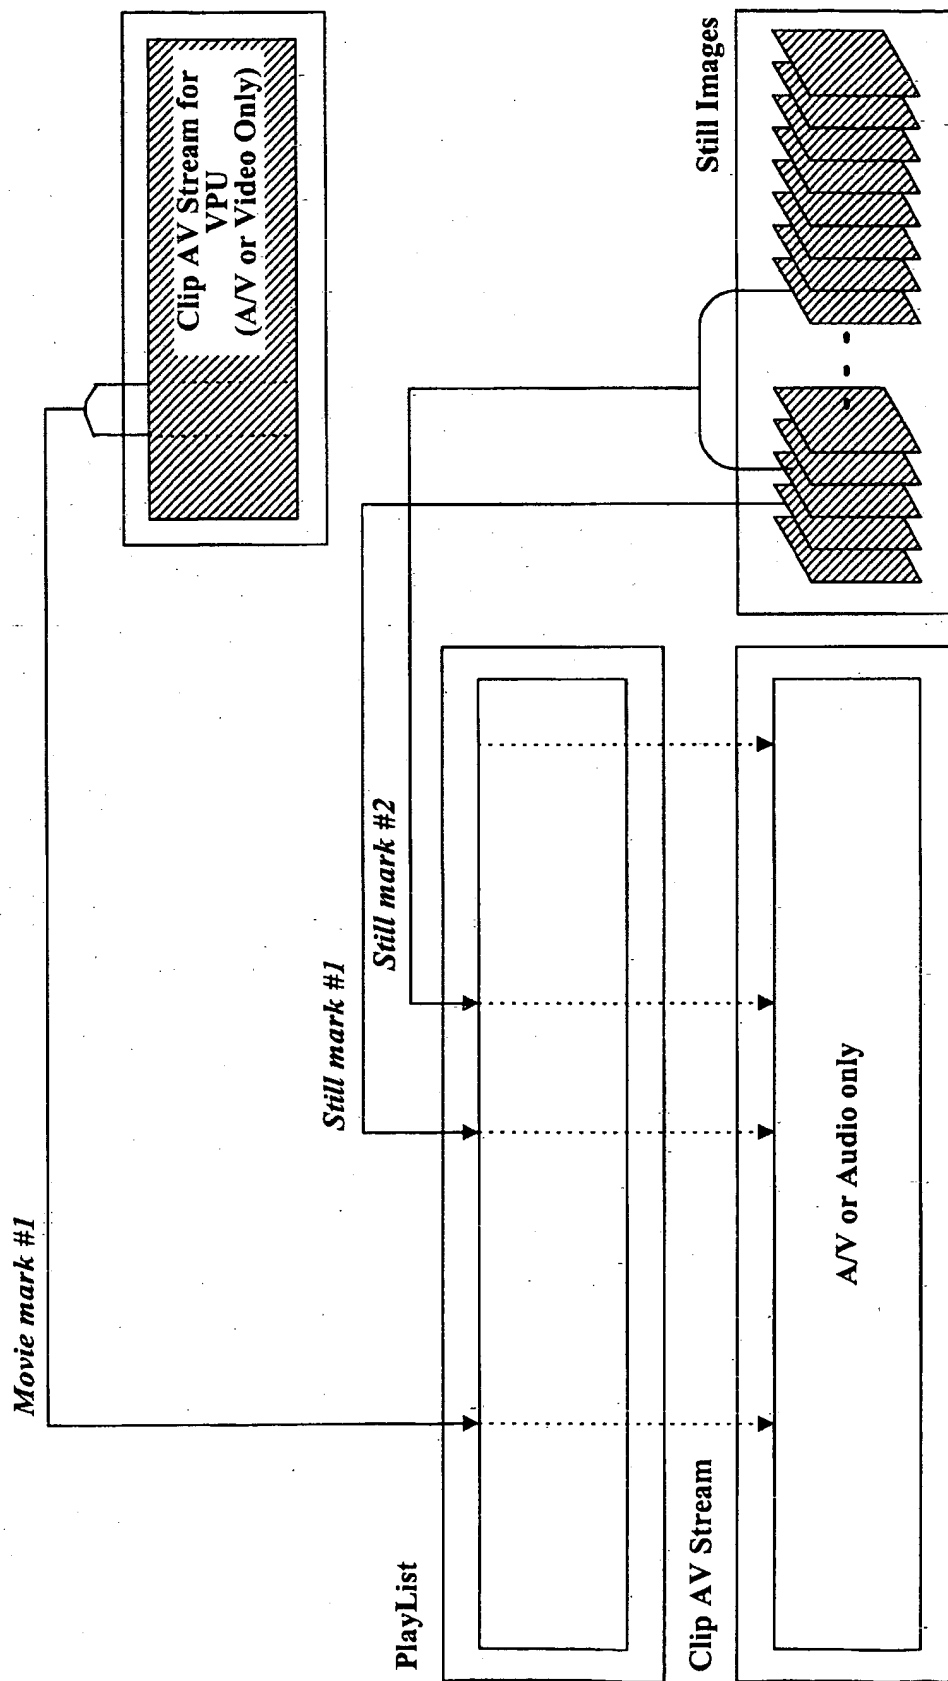

7/26

**FIG. 6***Caes 1*

```

PlayListMark(){
    length
    number_of_PlayList_marks
    for(i=0; j<number_of_PlayList_marks;j++){
        -----
        mark_type
        -----
        mark_time_stamp

        -----

        ref_to_still_image_index

        duration
        makers_information
        maker_name
    }
}

```

**FIG. 7A***Caes 2*

```

PlayListMark(){
    length
    number_of_PlayList_marks
    for(i=0; j<number_of_PlayList_marks;j++){
        -----
        mark_type
        -----
        mark_time_stamp

        -----

        ref_to_still_image_index
        duration
        makers_information
        maker_name
        if (mark_type==0x10){
            number_of_still_images
            display_timing_mode
            display_order_mode
            display_effect_mode
            display_effect_period
        }
    }
}

```

8/26

**FIG. 7B***Movie & Still Mark*

```

PlaylistMark(){
    length
    number_of_PlayList_marks
    for(i=0; j<number_of_PlayList_marks;j++){
        mark_type
        -----
        mark_time_stamp

        -----
        ref_to_still_image_index

        duration
        makers_information
        maker_name
        if(mark_type==0x10){
            number_of_still_images
            display_timing_mode
            display_order_mode
            display_effect_mode
            display_effect_period
        }
        if(mark_type == 0x11){
            VPU_Clip_file_name
            VPU_start_TM
            VPU_end_TM
            VPU_data_size
            VPU_info
        }
    }
}

```

**FIG. 7C***Movie Mark*

```


PlaylistMark(){
    length
    number_of_PlayList_marks
    for(i=0; j<number_of_PlayList_marks;j++){
        -----
        mark_type
        -----
        mark_time_stamp
        -----

        duration
        makers_information
        maker_name
    }
    if(mark_type == 0x11){
        VPU_Clip_file_name
        VPU_start_TM
        VPU_end_TM
        VPU_data_size
        VPU_info
    }
}

```

9/26


**FIG. 8A**

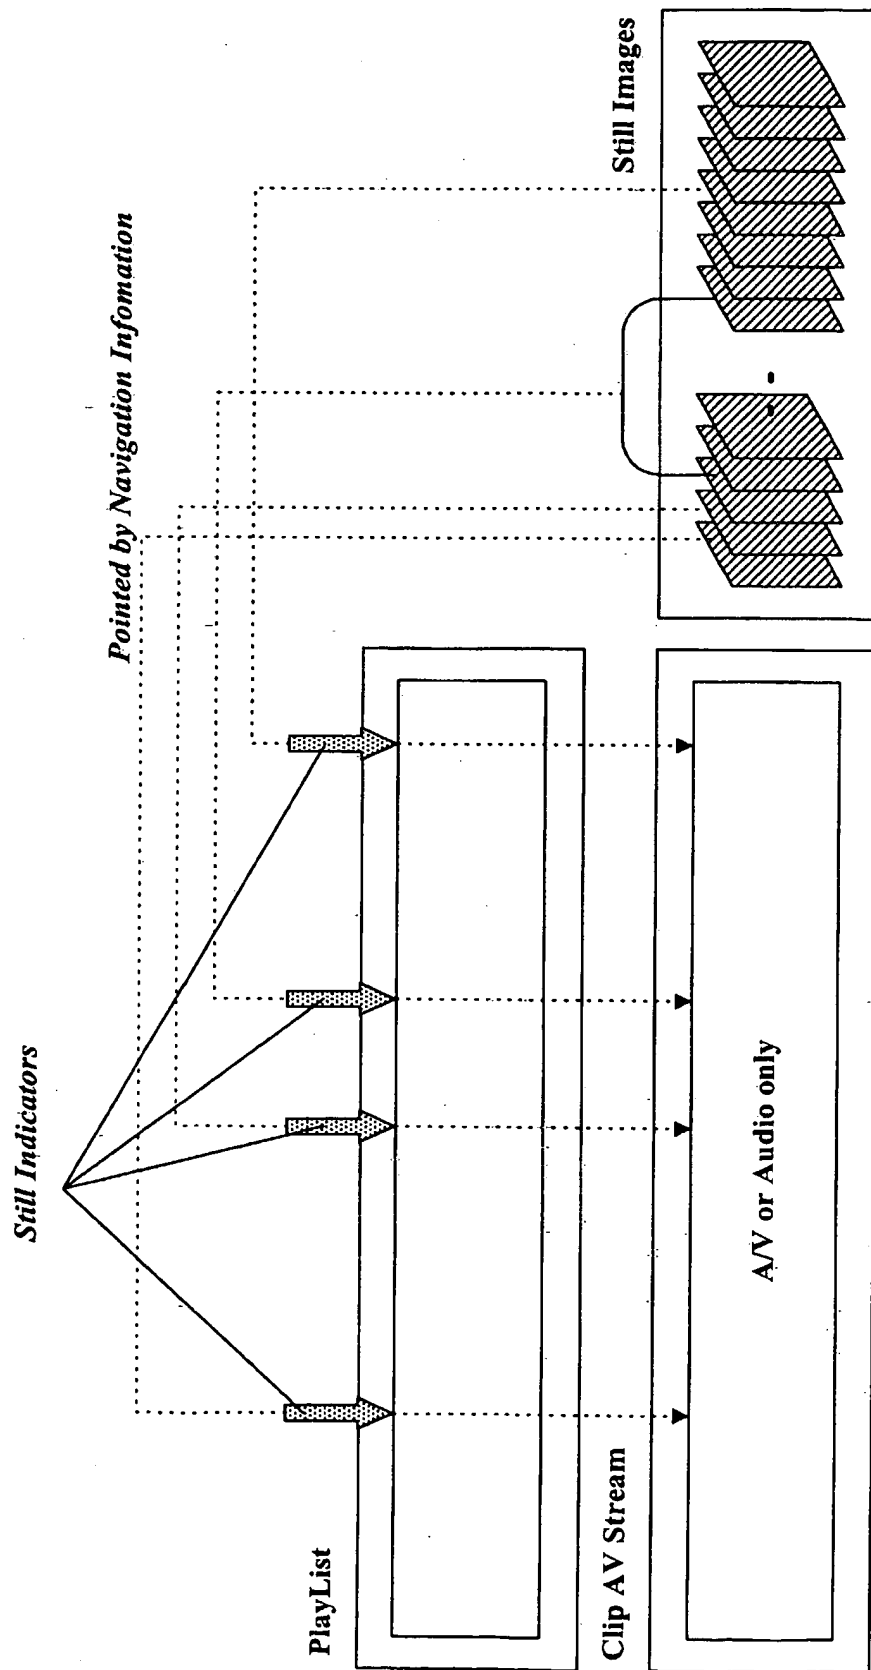



10/26

**FIG. 8B**

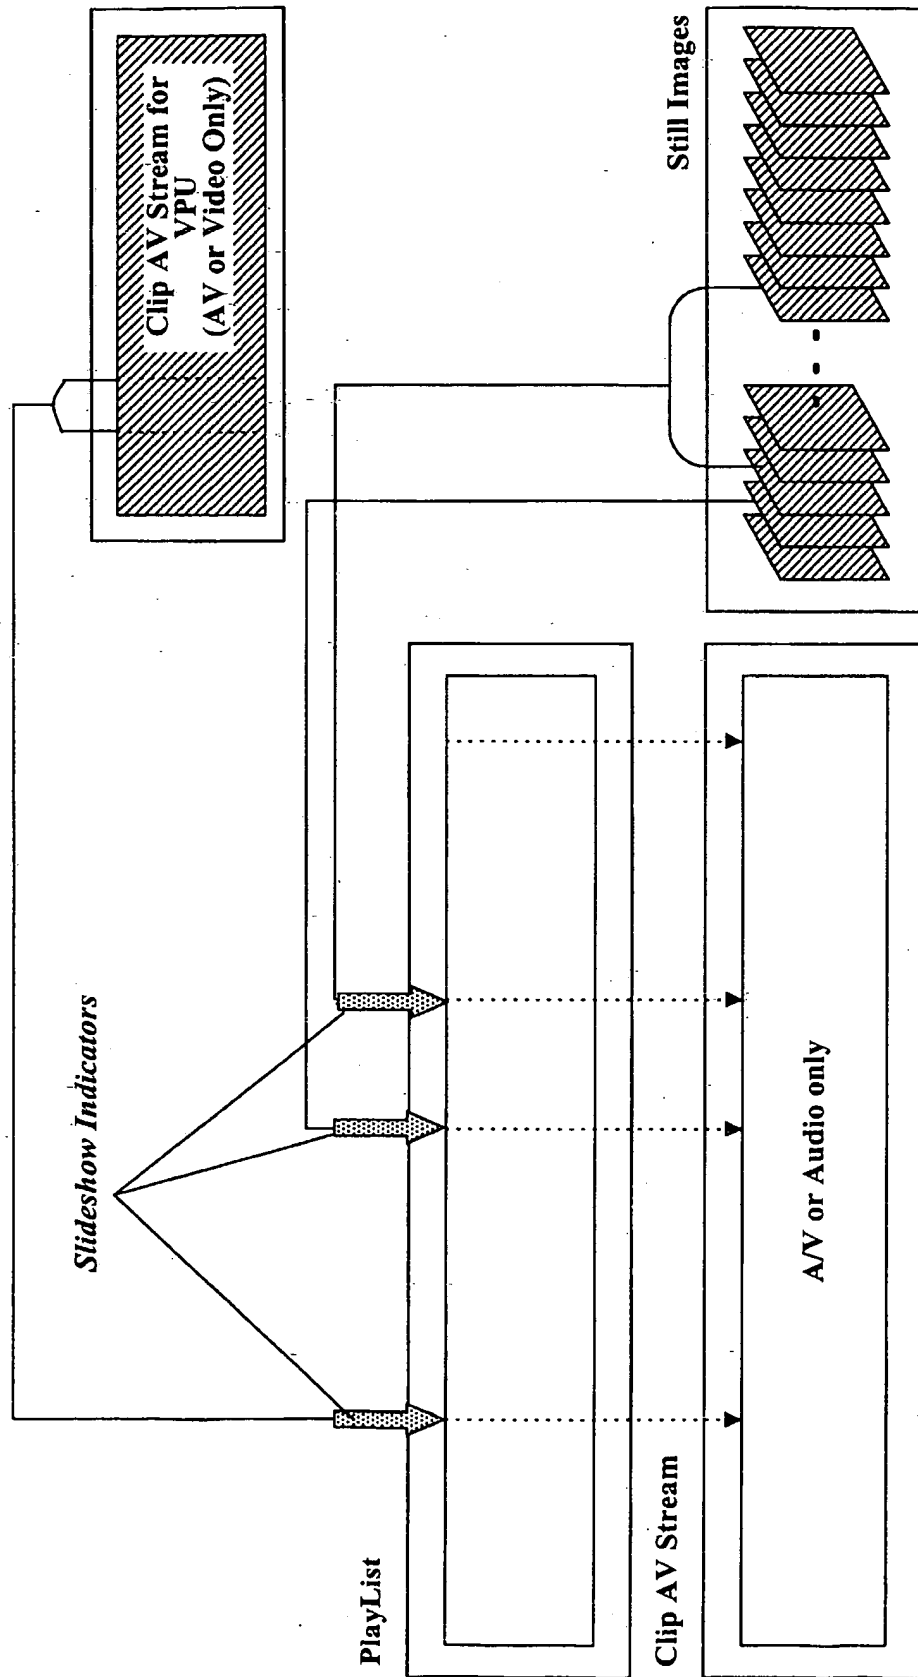

11/26

```

PlayList_File(){
    -----
    version_number
    -----
    PlayList()
    PlayListMark()
    MakersPrivateData()
    PlayListStillIndicator() •
}

```

**FIG. 9A**

```

PlayListStillIndicator()
    length
    number_of_PlayList_stills
    for(still_id=0; still_id<number_of_PlayList_Still;still_id++){
        -----
        still_time_stamp
        ref_to_still_start_index
        number_of_still_images
        for(i=0; i<number_of_still_images;j++){
            duration
            display_timing_mode
            display_order_mode
            display_effect_mode
            display_effect_period
        }
    }
}

```

12/26

```

PlayList_File(){
  -----
  version_number
  -----
  PlayList()
  PlayListMark()
  MakersPrivateData()
  PlayListSlideshowIndicator()
}

```


**FIG. 9B**

```

PlayListSlideshowIndicator()
  length
  number_of_slideshow_objects
  for(id=0; id<number_of_slideshow_objects;id++){
    -----
    time_stamp
    if(Still Image)
      ref_to_still_start_index
      number_of_still_images
      for(i=0; i<number_of_still_images;i++){
        duration
        display_timing_mode
        display_order_mode
        display_effect_mode
        display_effect_period
      }
    }
  else if(VPU) {
    VPU_duration
    VPU_Clip_file_name
    VPU_start_PTM
    VPU_end_PTM
    VPU_data_size
    VPU_info
  }
}

```

**FIG. 10**

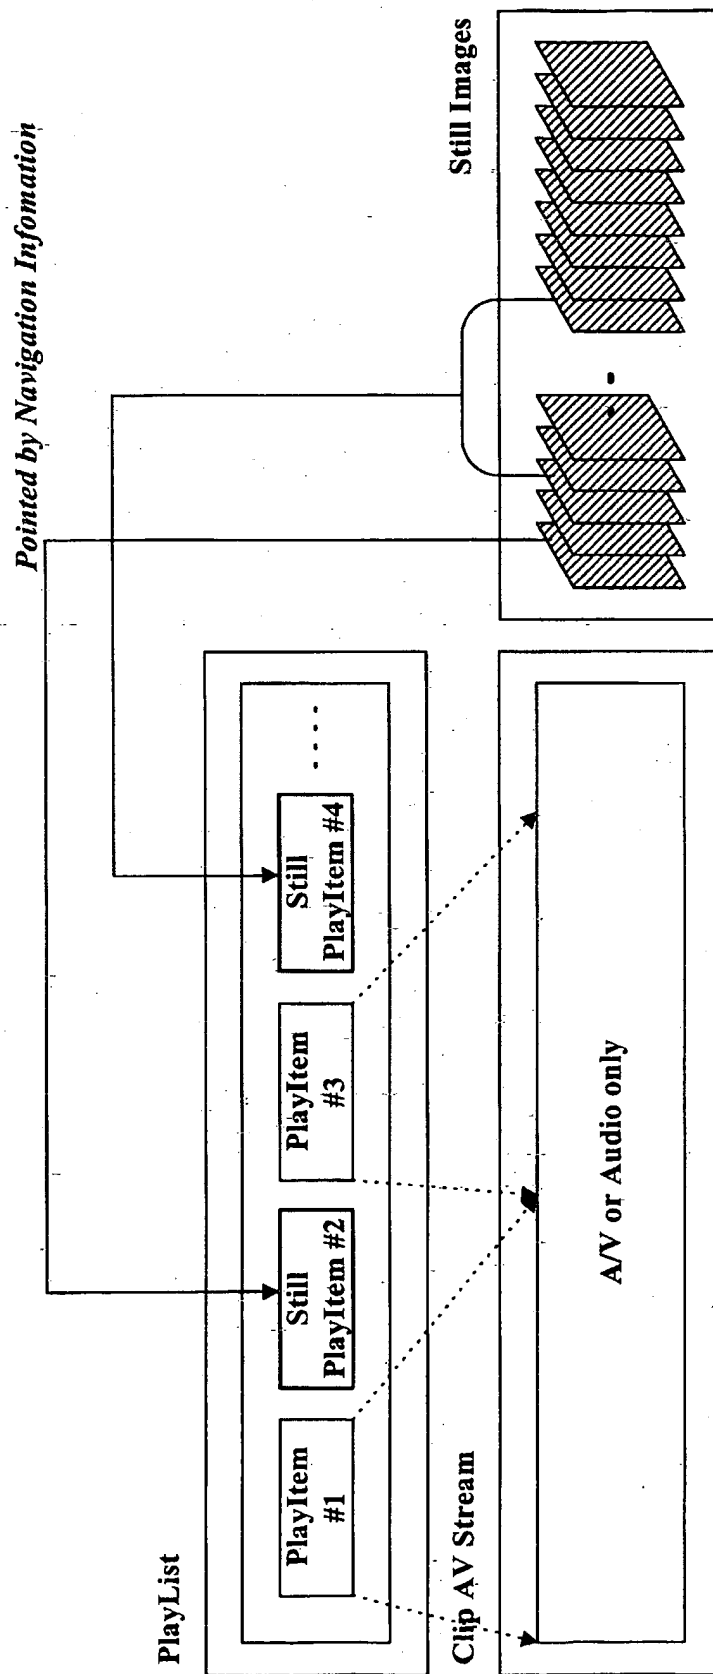

**FIG. 11A**

```

PlayItem(){
    length
    Clip_Information_file_name
    Clip_codec_identifier
    if (CPI_type = 1)
        ref_to_STC_id
        :
        :
    IN_time
    Out_time
    :
    :
}
if (<Still-Image>) {
    for (i=0; j<number_of_still_images; j++){
        duration
        display_timing_mode
        display_order_mode
        display_effect_mode
        display_effect_period
    }
}
}

```

**FIG. 11B**

```

PlayItem(){
    length
    Clip_Information_file_name
    Clip_codec_identifier
    if (CPI_type = 1)
        ref_to_STC_id
        :
        :
    if (VPU) {
        VPU duration
        VPU_Clip_file_name
        VPU_start_PTM
        VPU_end_PTM
        VPU_info
    }
}
}

```

**FIG. 12A**


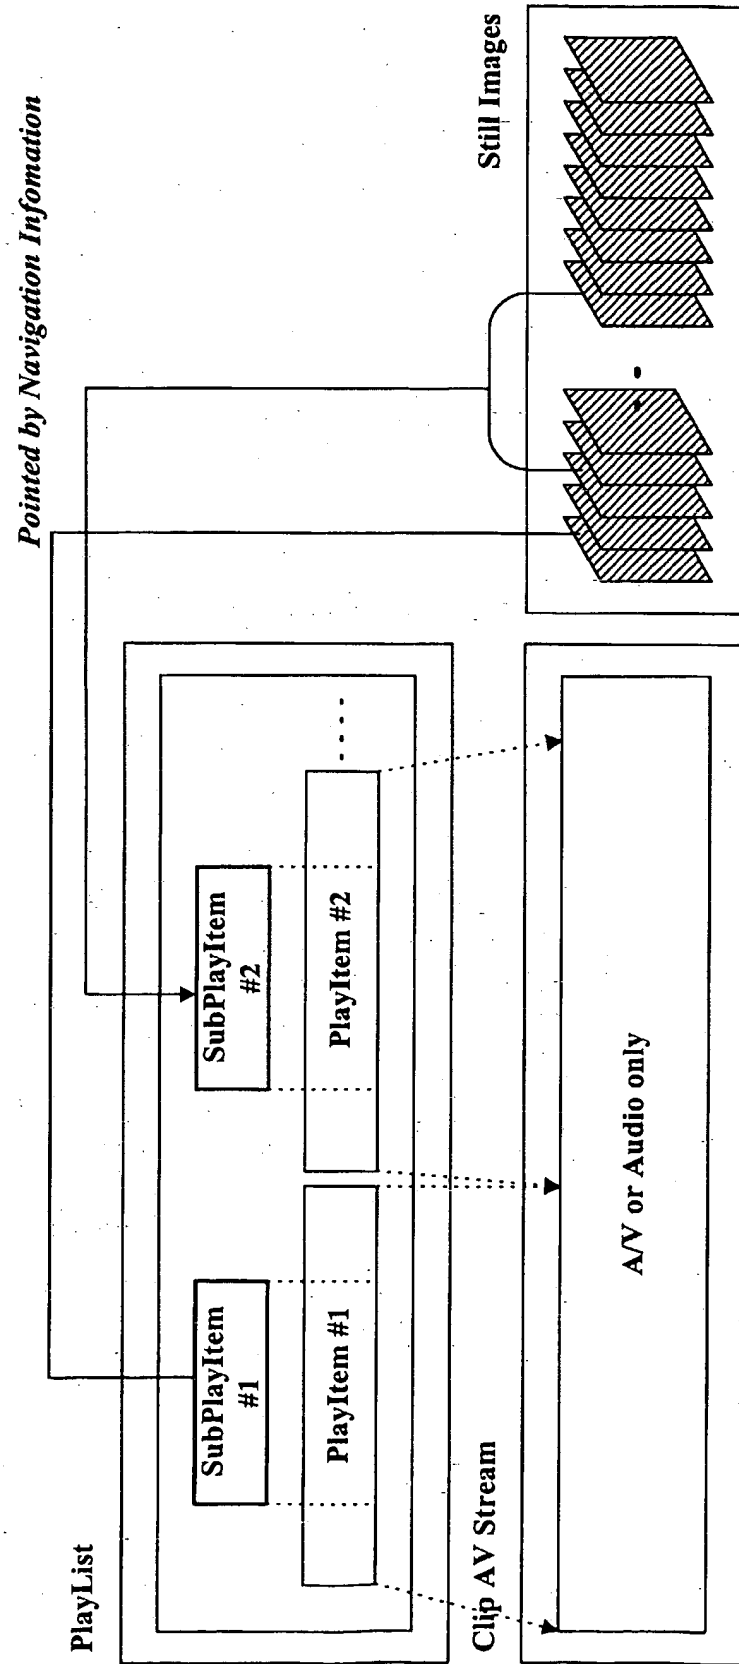


FIG. 12B




**FIG. 13A**


```
SubPlayItem(){  
    length  
    Clip_Information_file_name  
    Clip_codec_identifier  
    SubPlayItem_type  
    ref_to_STC_id  
    SubPlayItem_IN_time  
    SubPlayItem_Out_time  
    sync_PlayItem_id  
    Sync_start_PTS_of_PlayItem  
    if (<Still-Image>) {  
        number_of_still_images  
        for (i=0; j<number_of_still_images; j++){  
            duration  
            display_timing_mode  
            display_order_mode  
            display_effect_mode  
            display_effect_period  
        }  
    }  
}
```

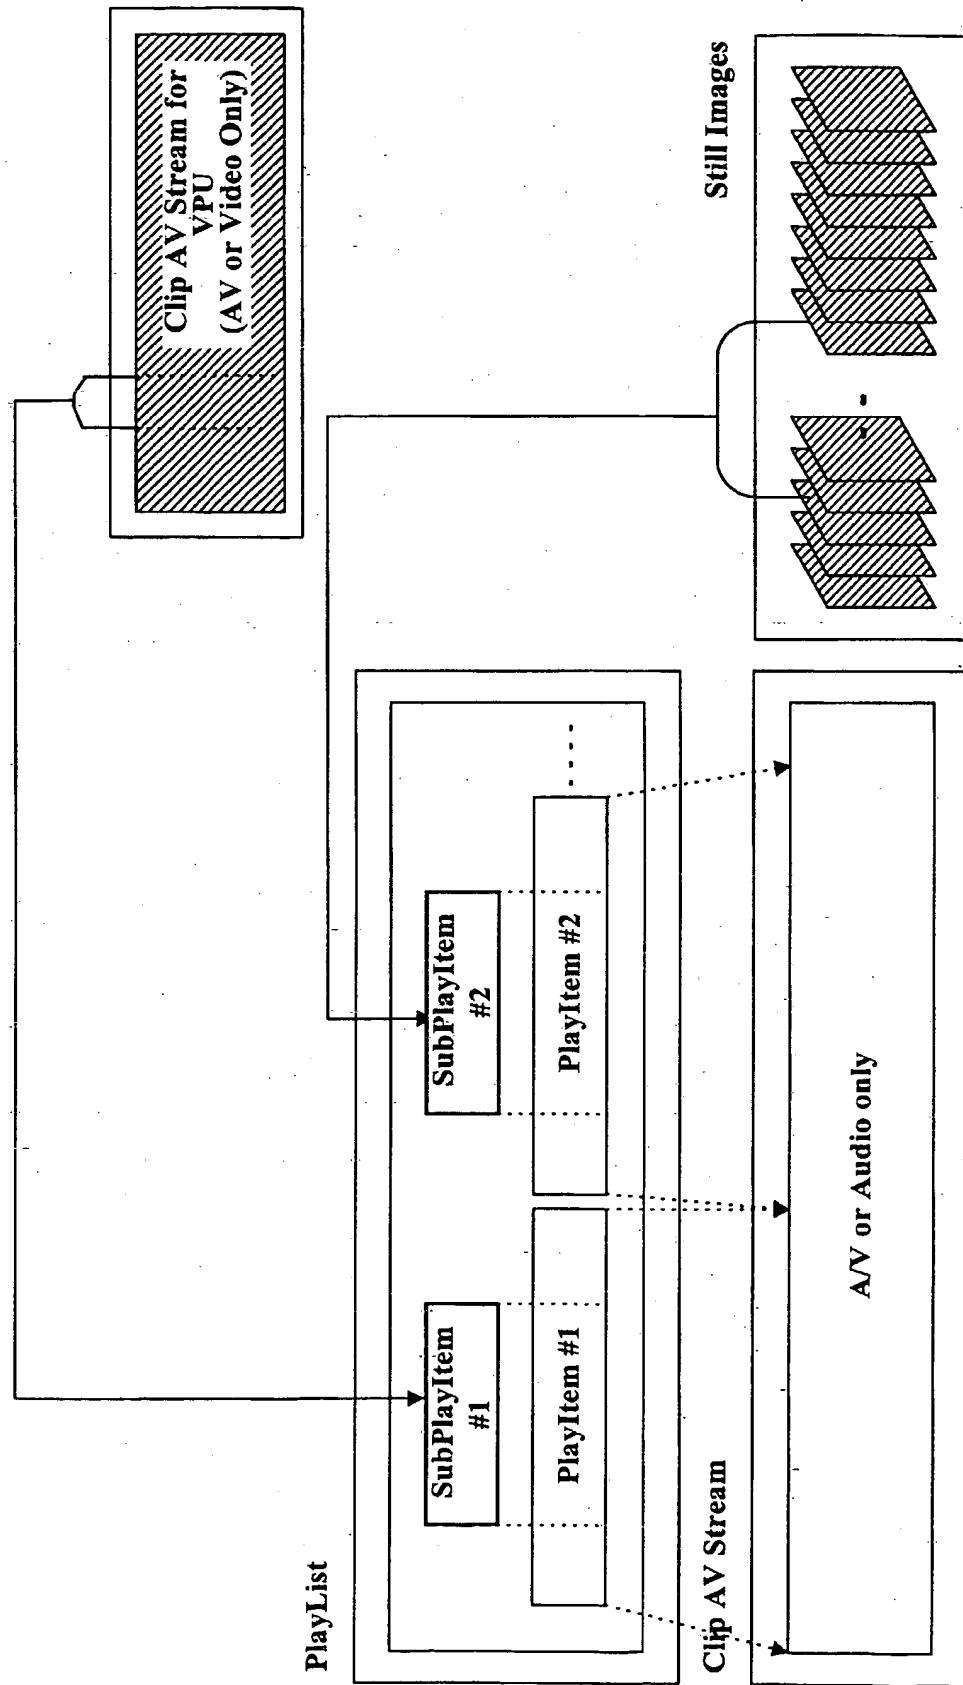


**FIG. 13B**


```
SubPlayItem(){  
    length  
    Clip_Information_file_name  
    Clip_codec_identifier  
    SubPlayItem_type  
    ref_to_STC_id  
    SubPlayItem_IN_time  
    SubPlayItem_Out_time  
    sync_PlayItem_id  
    Sync_start_PTS_of_PlayItem  
    if(<Still-Image>){  
        number_of_still_images  
        for(i=0; j<number_of_still_images; j++){  
            duration  
            display_timing_mode  
            display_order_mode  
            display_effect_mode  
            display_effect_period  
        }  
    }  
    if(<VPU>){  
        VPU_data_size  
        VPU_info  
    }  
}
```

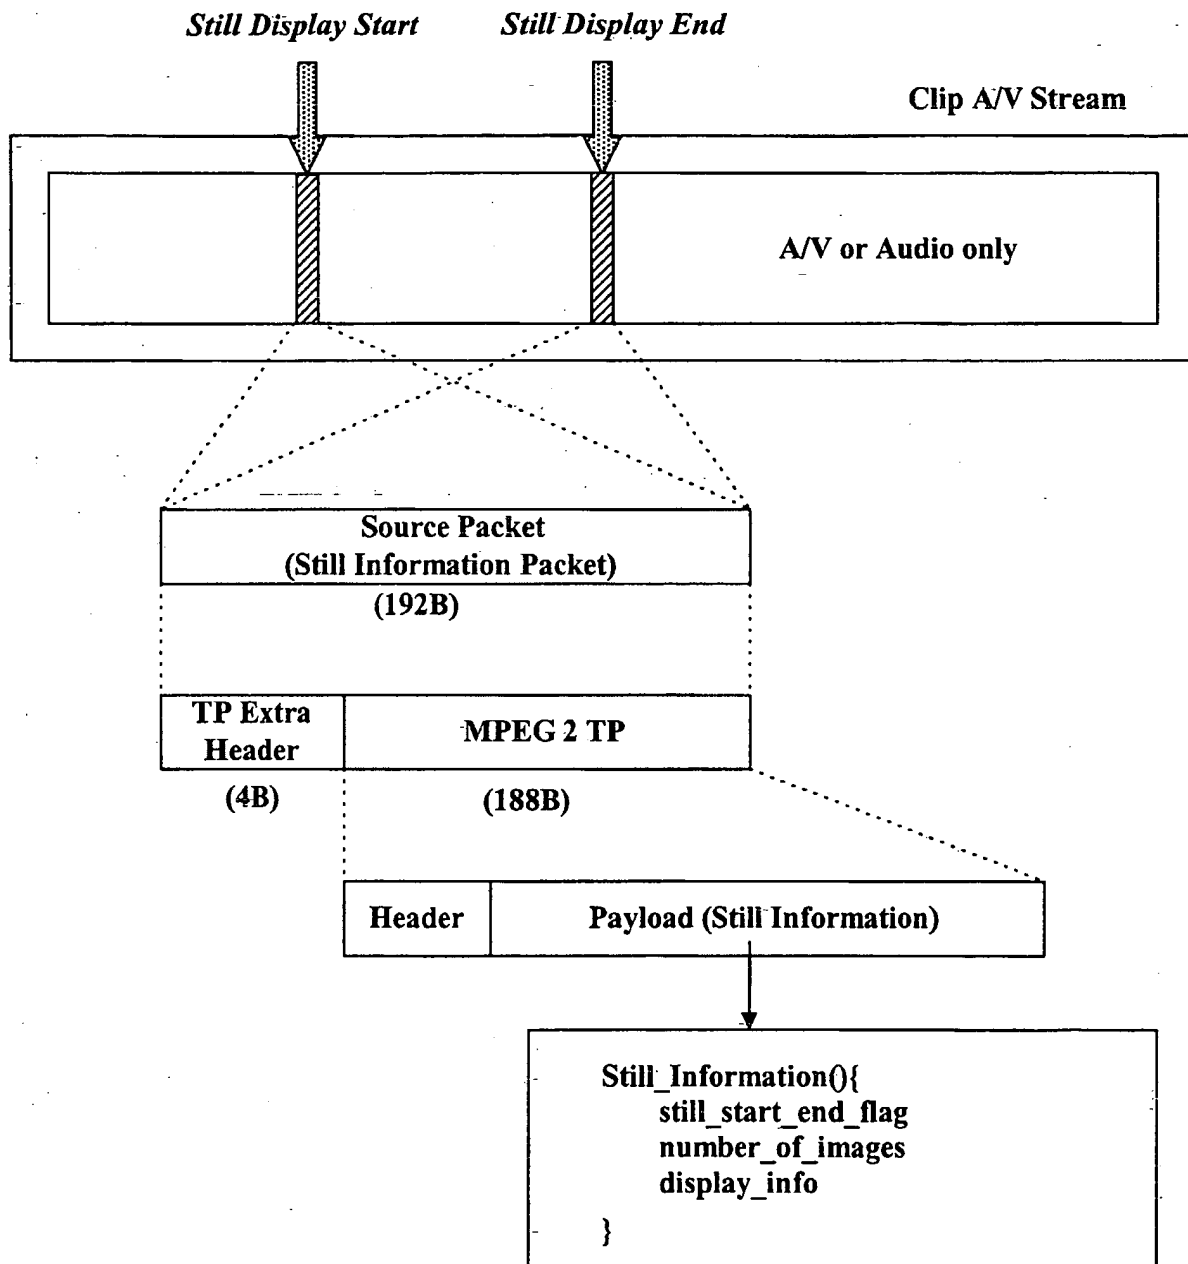**FIG. 14A**

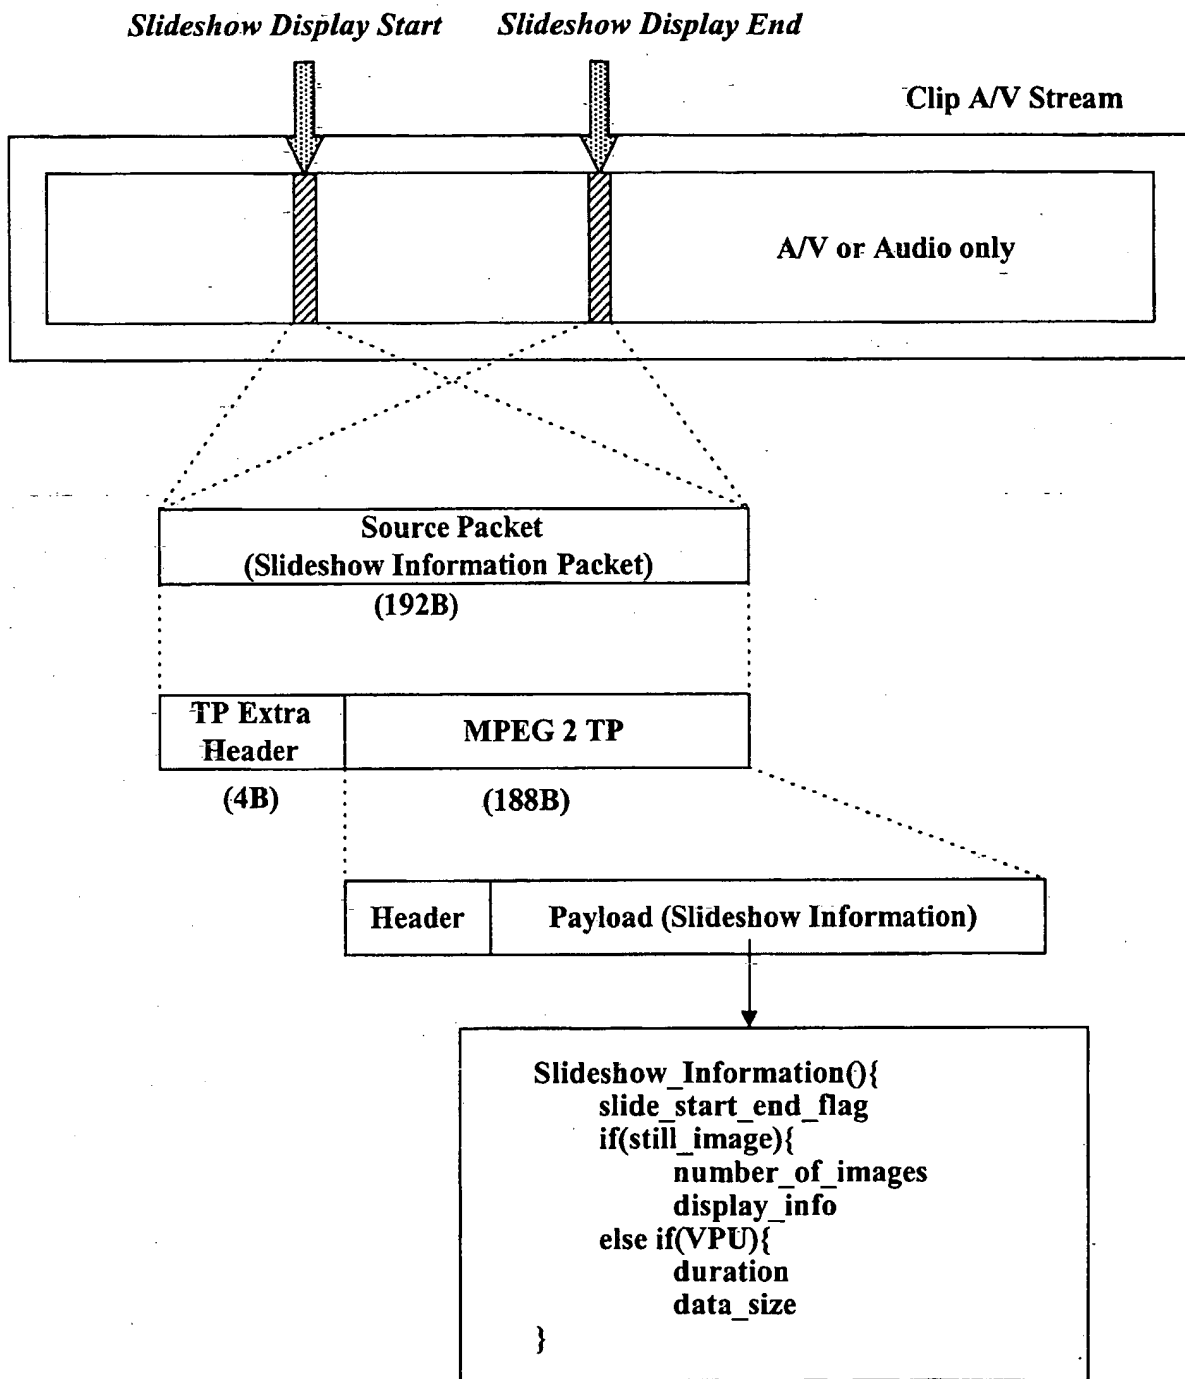**FIG. 14B**

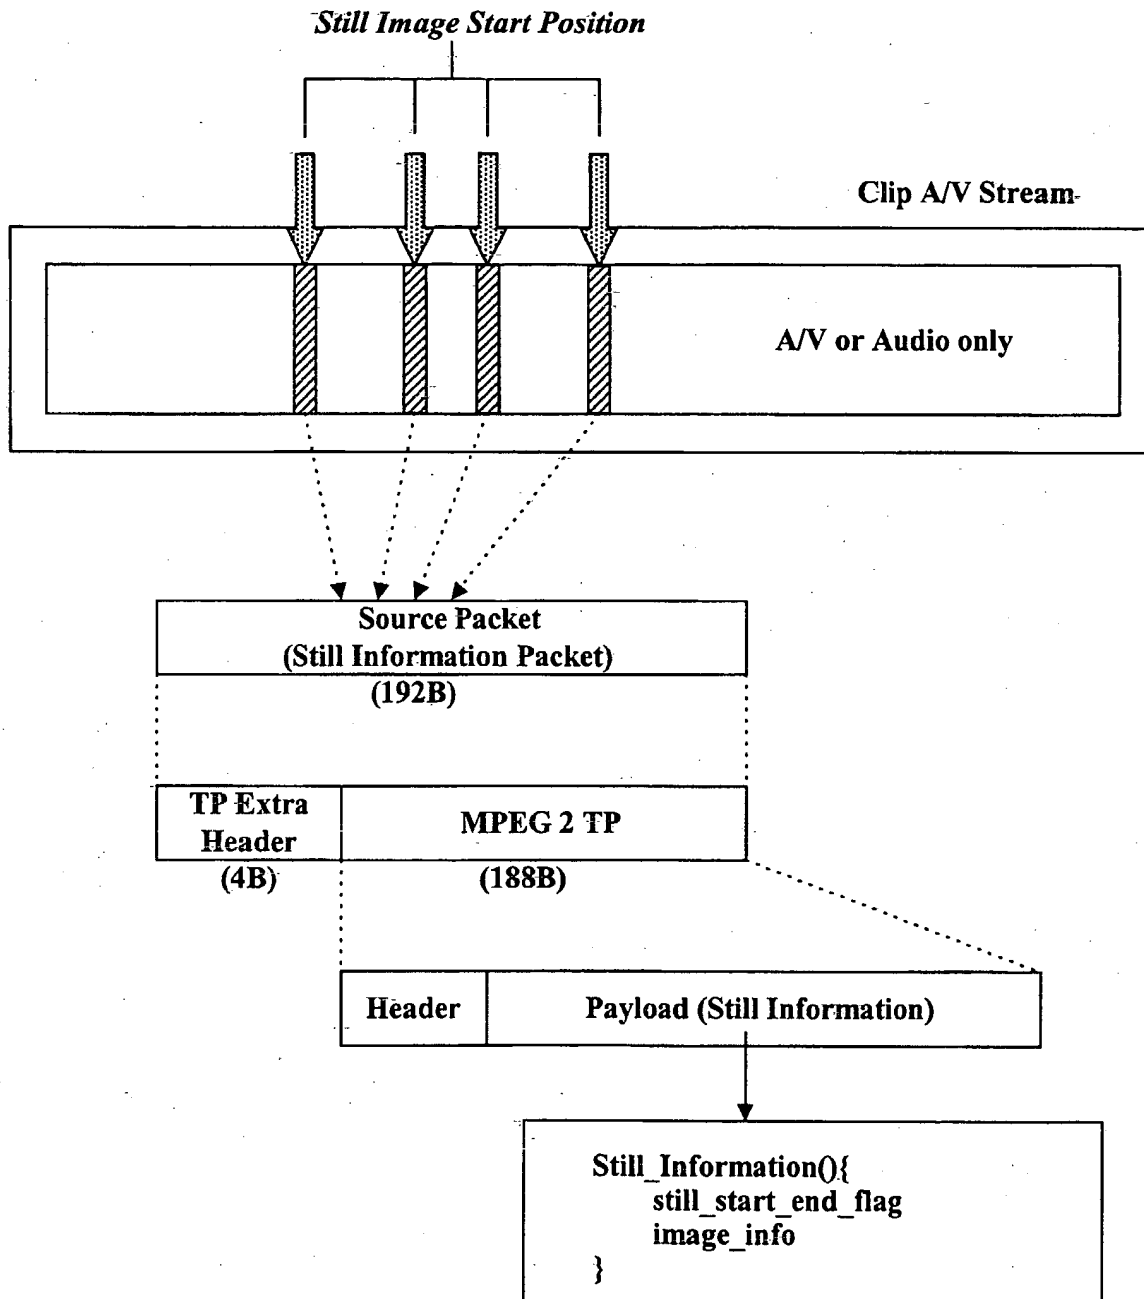
**FIG. 15**

22/26

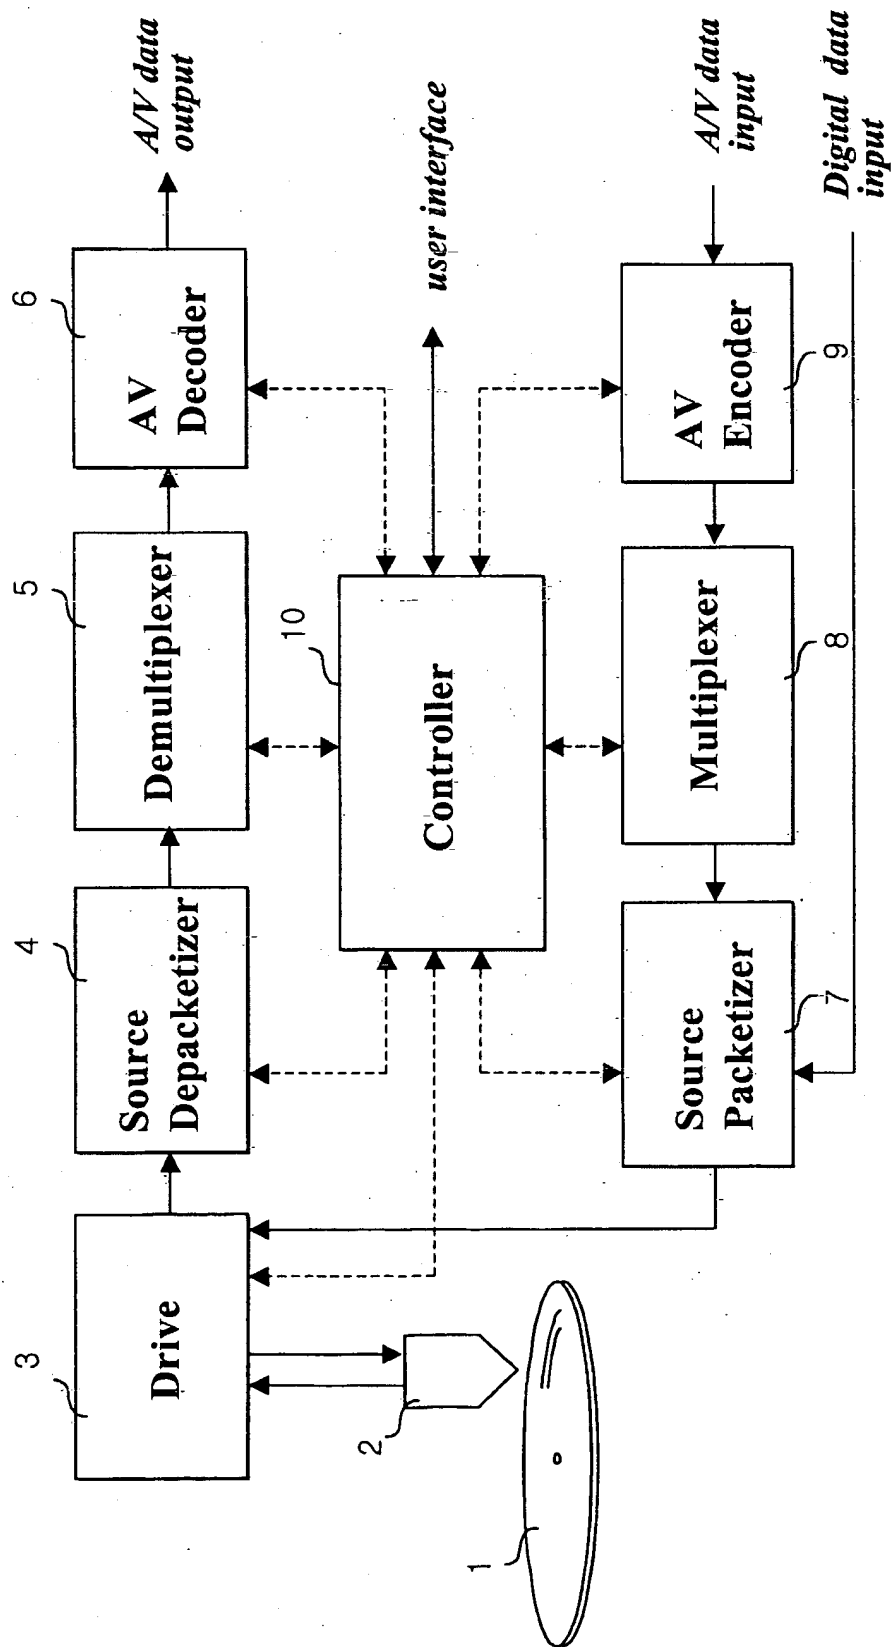**FIG. 16**


**FIG. 17**

*Synchronized Slideshow  
( Sequential Display Mode )*

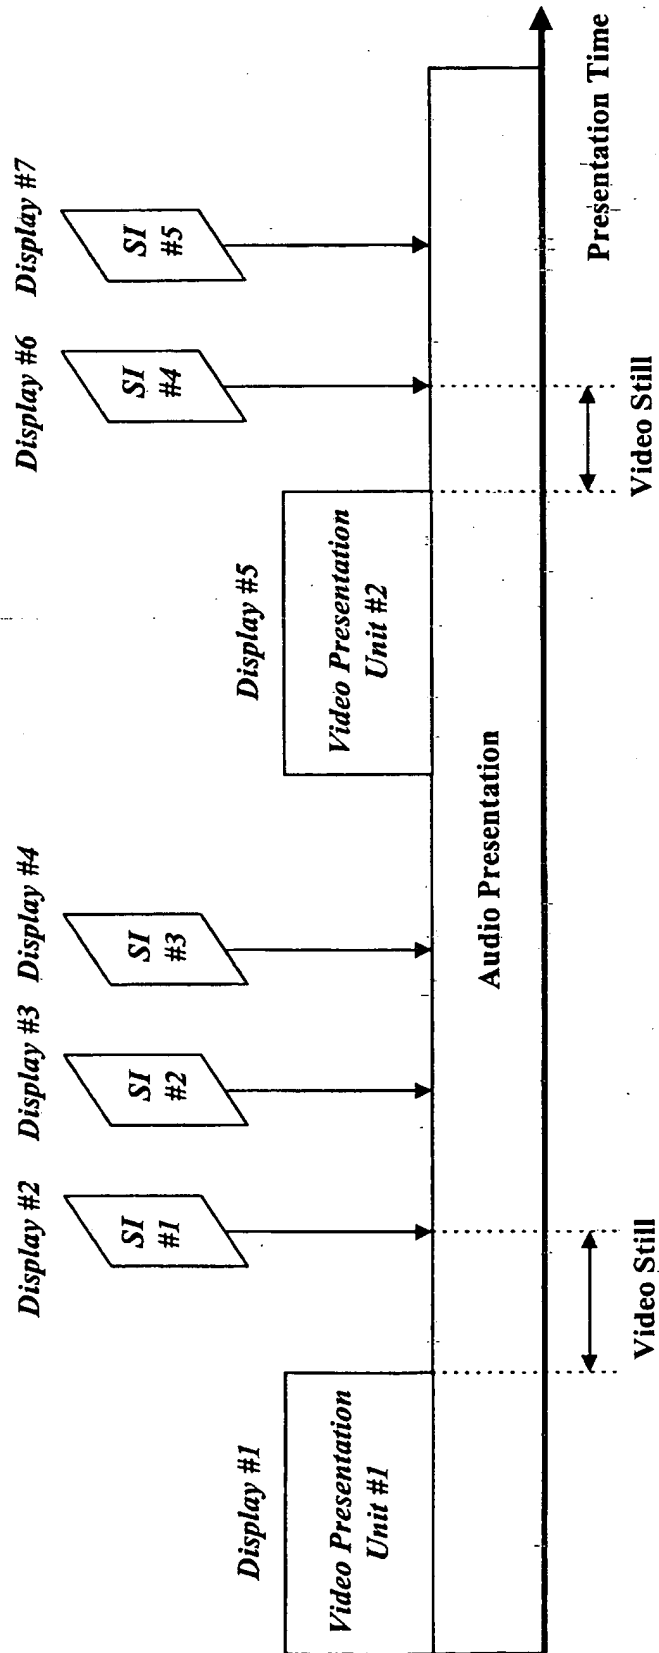


**FIG. 18**

*Synchronized Slideshow  
( Random/Shuffle Display Mode : A )*

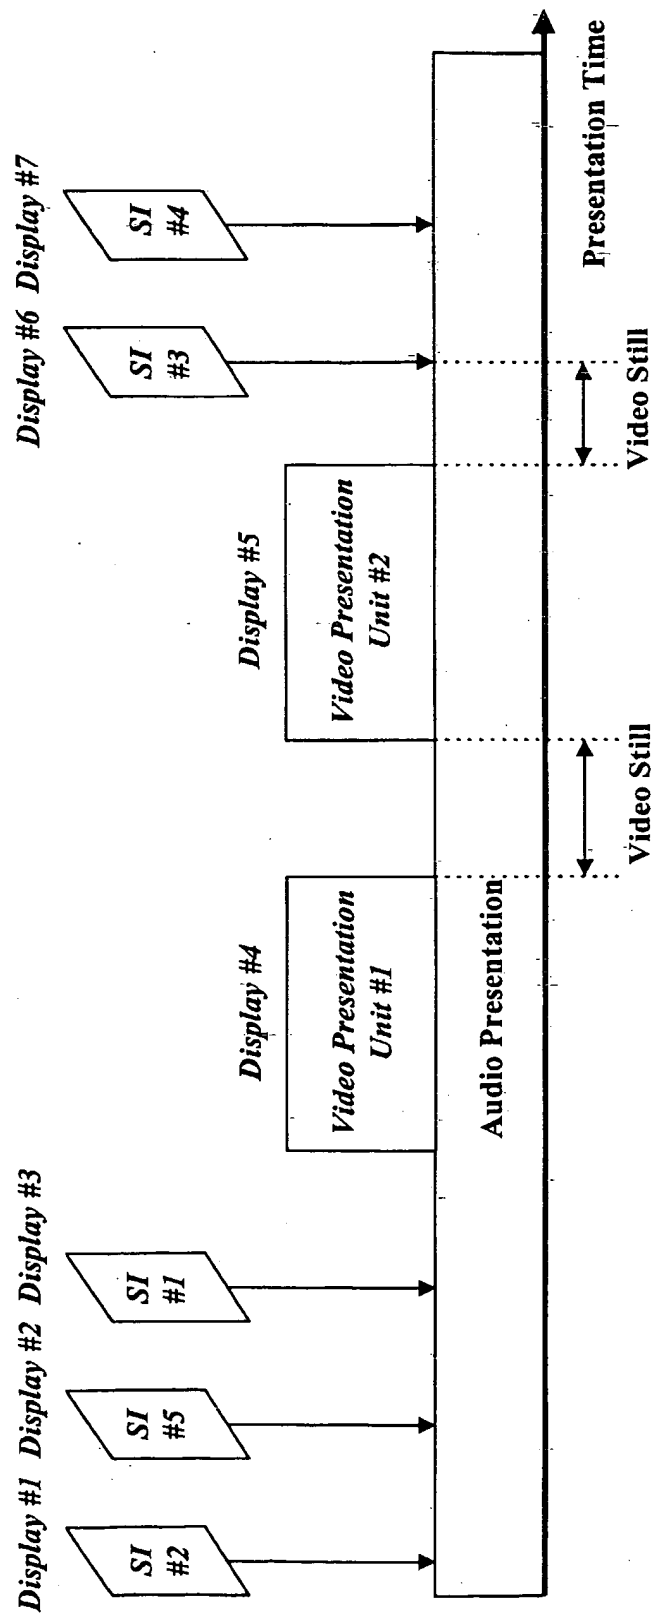

**FIG. 19**


*Synchronized Slideshow  
( Random/Shuffle Display Mode : B )*

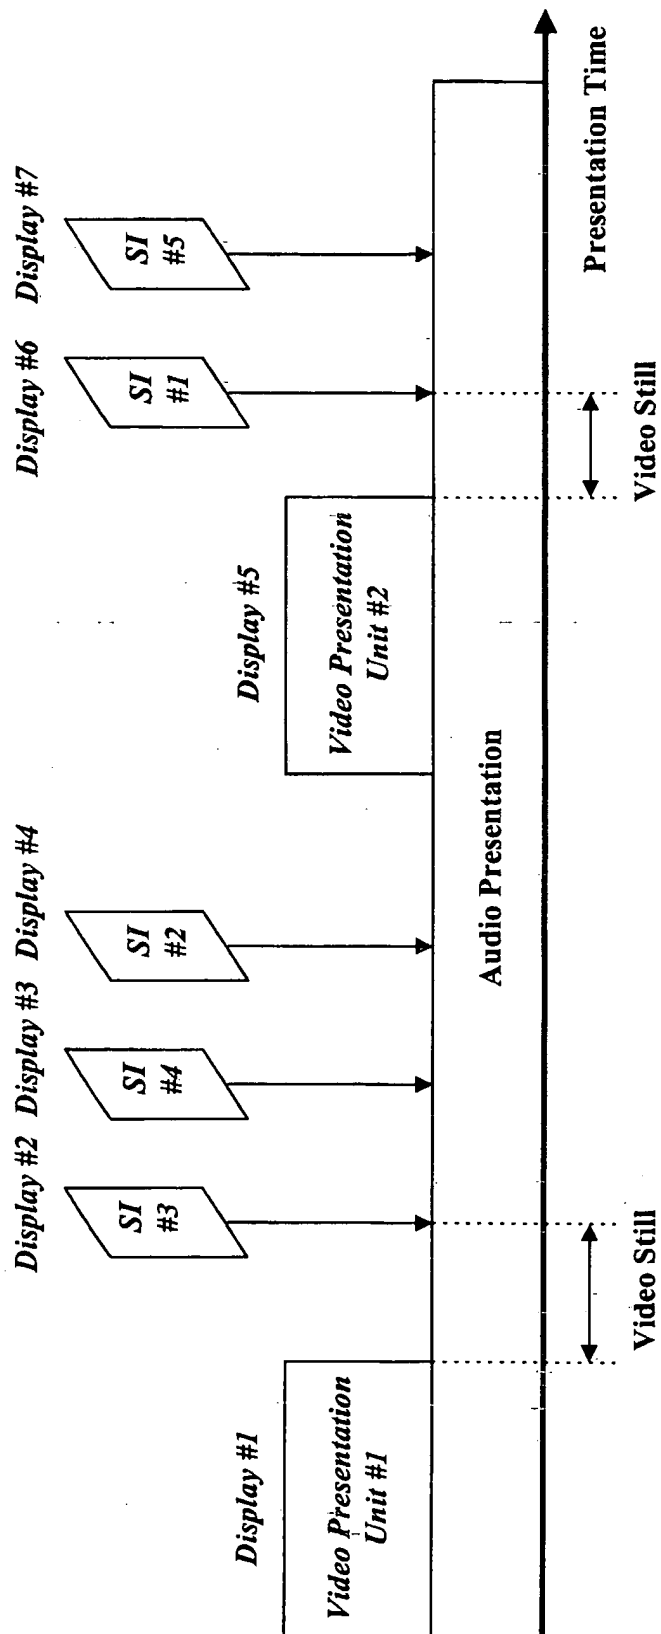



**FIG. 20**

*Browsable Slideshow  
( Sequential Display Mode )*

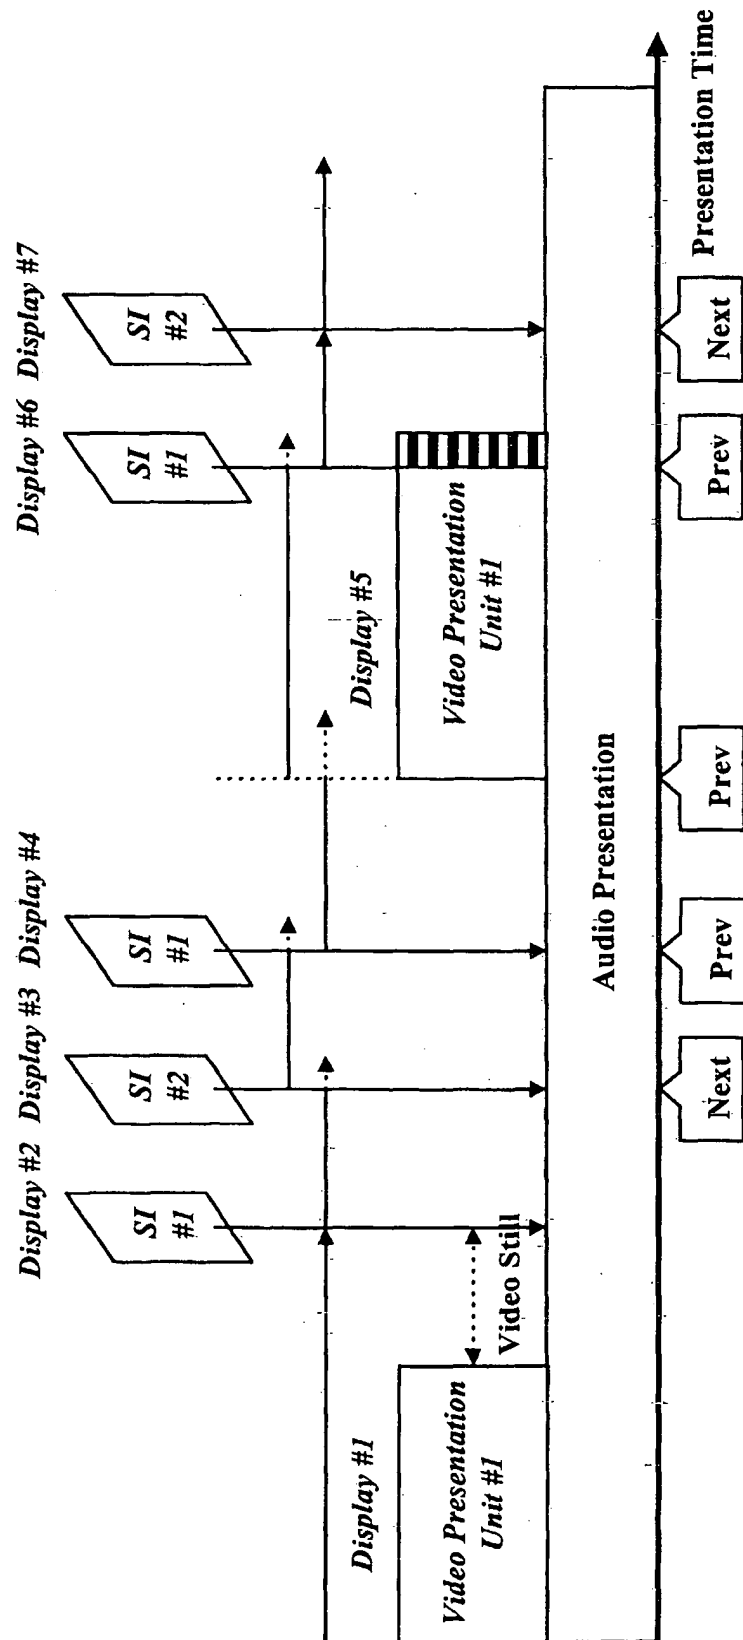

**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 G11B 20/12**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B 20/12 19/02 20/10 27/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 9-17101 A (TOSHIBA CORP) 17 JANUARY 1997 SEE THE WHOLE DOCUMENT	1, 14
A	EP 1 113 439 A (SAMSUNG ELECTRONICS) 4 JULY 2001 SEE THE WHOLE DOCUMENT	1, 14
A	EP 1 045 393 A (SONY CORP) 18 OCTOBER 2000 SEE THE WHOLE DOCUMENT	1, 14

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified).
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

23 DECEMBER 2003 (23.12.2003)

Date of mailing of the international search report

24 DECEMBER 2003 (24.12.2003)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

CHOI, Jung Yun

Telephone No. 82-42-481-5686

